

**MAYTAG**

## TECHNICAL SPECIFICATIONS

*Model PSH4BD Series*



M1200 Product Line

**R-410A High Efficiency Heat Pump  
13 SEER — 1.5 - 5 Ton Capacity**

- **M1200 – 12 YEAR ALL PARTS LIMITED WARRANTY**
- **M1200 WITH UPGRADED WARRANTY PACKAGE - 12 YEAR ALL PARTS & LABOR LIMITED WARRANTY**
- **Both the standard and upgraded limited warranty packages offer a 12 Year Dependability Promise to replace the entire unit, if the unit's major component (heat exchanger or compressor) fails within the first 12 years of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil to qualify.**
- **Product registration (by consumer or dealer) required for 12-year Warranty and Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at [www.maytagvac.com](http://www.maytagvac.com) or ask your sales representative.**
- **Dealer is responsible for registration of labor portion of warranty.**




Maytag now offers the choice of a heat pump that uses a more efficient and environmentally friendly refrigerant designated R-410A. The PSH4BD Series of heat pumps offers exceptional performance from a small, compact package. The unit, when combined with our engineered coils or air handlers, offers a full line of quality, split system cooling equipment.

### Features and Benefits


- **ComfortAlert™ Module** – Detects system and electrical problem conditions. A diagnostics key directs the service technician to the root cause of a problem.
- **Smart Cool 410™ Refrigerant (R-410A)** – Earth friendly non-ozone depleting refrigerant.
- **Durable attractive stainless steel cabinet** – Durable brushed stainless steel protects the coil from yard hazards and extreme weather. Unit is trimmed in a silicone-protected polyester finish with a 950 hour salt spray that resists corrosion 50% better than comparable units.
- **Quiet Plus™ Sound Package** – Consists of a Quiet Plus™ Compressor Sound Blanket and a Swept Wing Fan Blade. Both have been engineered to significantly reduce unwanted noise.
- **Copper Tube / Aluminum Fin Coils** – Coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Permanently Lubricated Motor** – A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **Low Pressure Switch** – Loss of charge protection ensures long compressor life. Auto-reset feature prevents nuisance service visits.
- **High Pressure Switch** – Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter / Drier** – Included with unit, field installed.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Five Minute Restart Time Delay** – When the unit shuts down, a five minute delay keeps the unit from restarting, eliminating the highest cause for compressor failure.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Composite Base Pan** – Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.

## DIMENSIONS/OUTDOOR SECTION

PSH4BD	018K	024K	030K	036K	042K	048K	060K
H	33 1/2	37 1/2	41 1/2	45 1/2	41 1/2	45 1/2	45 1/2
W	30 3/4	30 3/4	30 3/4	30 3/4	30 3/4	30 3/4	30 3/4
D	30 3/4	30 3/4	30 3/4	30 3/4	30 3/4	30 3/4	30 3/4

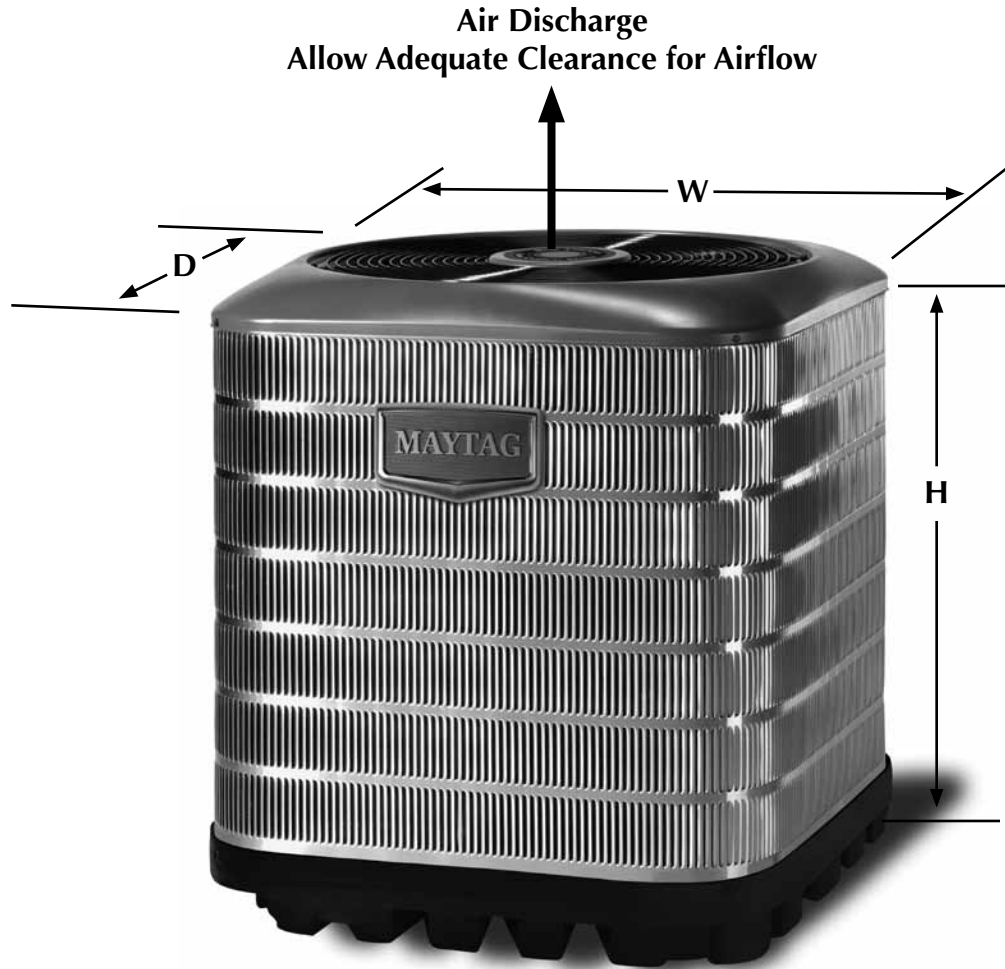

## IDENTIFICATION CODE

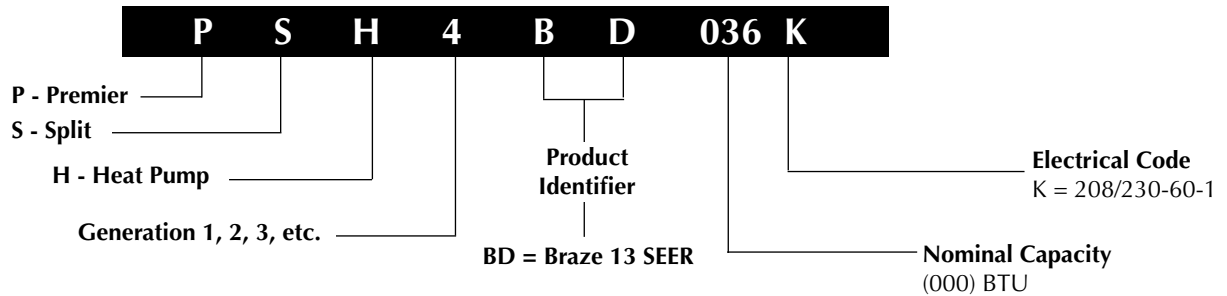

# PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

## 13 SEER — High Efficiency — Single Phase

Model Number PSH4BD-		018K	024K	030K	036K	042K	048K	060K	
Electrical Data	Volts-Cycles-Phase (1)	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	
	Total Amps	10.2	14.6	15.3	17.8	19.4	23.2	27.7	
	Delay Fuse Max. (2)	20	30	30	35	40	50	60	
	Min. Circuit Ampacity	12.4	18.0	18.8	22.0	23.9	28.7	34.3	
Condenser Data	Coil	Area	17.7	20.3	22.8	25.3	22.8	25.3	25.3
		Rows-FPI	1-18	1-18	1-20	1-20	2-16	2-16	2-16
		Tube Dia	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.
	Fan Motor	Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
		Amps	1.2	1.2	1.2	1.2	1.46	1.46	1.46
		HP	0.2	0.2	0.2	0.2	0.25	0.25	0.25
	Fan Blade	Dia - # Blades	24" - 2						
		SCFM	3000	3200	3300	3400	3700	3800	3800
	Compressor Data	RLA	9.0	13.4	14.1	16.6	17.9	21.8	26.2
		LRA	48.0	58.3	73.0	79.0	112.0	117.0	134.0
Refrigerant suction line O.D. Note: Liquid line is 3/8" O.D. for entire length	0-24 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"	
	25-39 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8" (3)	
	40-75 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8" (3)	
Approximate Weight (lbs.)	Net	166	171	176	181	247	280	290	
	Ship	175	180	185	190	260	295	305	
Sound Rating db (5)		67.0	67.0	67.0	69.0	71.0	71.0	71.0	

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 7/8" to 1-1/8" reducer from line to unit.

(4) Additional charge for line sets above 15 feet.

Values based on suction line as follows with 3/8" liquid line.

a) 3/4" = 0.6 oz. per additional foot.

b) 7/8" = 0.7 oz. per additional foot.

c) 1 1/8" = 0.8 oz. per additional foot.

5) Tested in compliance with AHRI 270-2008 but not listed with AHRI.

## ACCESSORIES - CONDENSING UNIT

### Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

### Outdoor Thermostat - 913852

Two stage logic provides ability to lock out electric strips down to balance point and bring on in stages.

### Snow Stand Kit - 920636

### Extreme Wind Condition Mounting Kit - 920900

### Fan Delay Kit (TDR) - 918476

# SYSTEM HEATING & COOLING CAPACITIES

## 13 SEER — High Efficiency — Single Phase

Outdoor Unit Model Number PSH4BD-	Indoor Unit Model Number C6B(A,H)-	BTUH	SEER	EER	Heating Capacity BTUH @ 47°F	HSPF	Nominal SCFM
024K	X24(C,U)-A + MB6BM	23,800	13	12.5	23,800	8.0	750
024K	X24(C,U)-B + MB6BM	23,800	13	12.5	23,800	8.0	750
030K	X30(C,U)-A + MB6BM	28,400	13	12.0	29,400	7.8	800
030K	X30(C,U)-B + MB6BM	28,400	13	12.0	29,400	7.8	800
036K	X35(C,U)-B + MB6BM	35,600	13	12.0	36,000	8.0	1100
036K	X36(C,U)-B + MB6BM	35,600	13	12.0	36,000	8.0	1100
036K	X36(C,U)-C + MB6BM	35,600	13	12.0	36,000	8.0	1100
042K	X42(C,U)-B + MB6BM	42,000	13	13.0	42,000	8.0	1325
042K	X42(C,U)-C + MB6BM	42,000	13	13.0	42,000	8.0	1325
048K	X48(C,U)-C + MB6BM	48,000	13	11.7	47,000	8.0	1675
060K	X60(C,U)-C + MB6EM	57,000	13	12.0	55,000	8.0	1850

Outdoor Unit Model Number PSH4BD-	Indoor Unit + TDR	BTUH	SEER	EER	Heat Capacity BTUH @ 47 F	Heating Capacity BTUH @ 17 F	HSPF	SCFM
018K	GB5BMM024K-A	17,400	13.00	11.00	20,000	10,800	8.00	650
018K	GB5BMM024K-B	17,500	13.00	11.00	17,700	10,500	7.70	650
024K	GB5BMM024K-A	23,400	13.00	11.00	25,200	15,200	8.00	855
024K	GB5BMM024K-B	23,000	13.00	11.00	26,000	15,000	8.00	820
030K	GB5BMM030K-A	28,400	13.00	11.00	32,800	20,200	8.00	1125
030K	GB5BMM030K-B	28,400	13.00	11.00	32,200	19,200	8.00	1080
036K	GB5BMM036K-B	35,000	13.00	11.00	36,800	22,000	8.00	1170
042K	GB5BMM042K-B	40,000	13.00	11.00	41,600	25,600	7.90	1530
048K	GB5BMM048K-B	46,500	13.00	11.00	49,800	30,200	8.00	1360
048K	GB5BMM048K-C	47,500	13.00	11.00	47,500	30,000	8.00	1620
060K	GB5BMM060K-C	57,000	13.00	11.00	60,500	36,000	8.00	1665

Outdoor Unit Model Number PSH4BD	Indoor Unit Model Number GB5BM-O, B5BM-X, PAH2BMX	Cooling Capacity Btuh	SEER	EER	Heating Capacity BTUH @ 47°F	HSPF	Nominal SCFM
018K	24K(A,B)	18,000	13.0	11.05	18,000	7.7	625
024K	24K(A,B)	23,600	13.0	12.6	23,600	8.0	750
030K	30K(A,B)	29,400	13.0	12.0	30,000	8.0	850
036K	36KB	35,400	13.0	11.8	36,000	8.0	1200
042K	42KB	39,600	13.0	11.7	41,000	8.0	1400
048K	48KC	48,000	13.0	12.0	48,000	8.0	1600
060K	60KC	59,500	13.5	11.7	58,000	8.0	1750

Outdoor Unit Model Number PSH4BD	Indoor TXV Coil + TDR	Cooling Capacity BTUH	SEER	EER	Heating Capacity BTUH @47F	HSPF	Nominal SCFM
018K	C6B(A,H)-X24(C,U)-(A,B)	18,000	13	12.5	18,200	8.0	585
024K	C6B(A,H)-X24(C,U)-(A,B)	24,000	13	11.6	23,600	8.0	750
030K	C6B(A,H)-X30(C,U)-(A,B,C)	28,000	13	11.6	29,000	8.0	1000
036K	C6B(A,H)-X35(C,U)-(B,C)	35,600	13	12	36,000	8.0	1100
036K	C6B(A,H)-X36(C,U)-(B,C)	35,600	13	12	36,000	8.0	1100
042K	C6B(A,H)-X42(C,U)-(B,C)	42,000	13	12.95	42,000	8.0	1325
048K	C6B(A,H)-X47(C,U)-(B,C)	47,500	13	11.75	46,500	8.0	1675
048K	C6B(A,H)-X48(C,U)-(C,D)	47,500	13	11.75	46,500	8.0	1675

See current AHRI Directory for certified combinations and ratings.  
[www.ahridirectory.org](http://www.ahridirectory.org)

## SYSTEM HEATING & COOLING CAPACITIES (Continued)

### 14 SEER — High Efficiency — Single Phase

Outdoor Unit Model Number PSH4BD	Indoor Unit Model Number B4VM-, PAH4VM	Cooling Capacity Btuh	SEER	EER	Heating Capacity BTUH @ 47°F	HSPF	Nominal SCFM	Indoor Orifice
018K	X24KB	18,400	14	12.9	18,000	8.0	600	0.050
024K	X24KB	24,000	14	13.4	23,200	8.5	750	0.055
030K	X30KB	29,600	14	12.9	29,600	8.5	900	0.065
036K	X36KB	35,800	14	12.6	37,800	8.5	1180	0.073
042K	X48KC	41,500	14	13.5	41,500	8.5	1400	0.077
048K	X48KC	48,500	14	13.0	47,500	8.5	1600	0.080
060K	X60KC	59,500	13.5	12.0	57,500	8.5	1700	0.089

See current AHRI Directory for certified combinations and ratings.  
[www.ahridirectory.com](http://www.ahridirectory.com)

## COMFORT ALERT™ DIAGNOSTIC MODULE

Green POWER LED Indicates Voltage Is Present At The Power Connection Of The Module

Pass Through Ports Detect Run/Start Current; Spade Connectors Detect Tstat Demand and Pilot Voltage; Microprocessor Monitors Behavior To Determine Faults

Yellow ALERT LED Flashes To Indicate Fault Code

Red TRIP LED Indicates If Compressor Is Tripped Or Has No Power



Diagnostics Key Directs Service Tech To The Root Cause Of A Problem

# 13 SEER + LOOSE COIL COOLING EXPANDED RATINGS

**PSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) - LOOSE COIL**

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	18.8	16.6	1.33	17.9	16.3	1.47	17.0	16.0	1.62	15.9	15.5	1.78	14.9	14.9	1.96
	80	67	20.5	14.1	1.33	19.5	13.7	1.47	18.5	13.2	1.62	17.4	12.7	1.78	16.1	12.2	1.96
	80	72	22.6	11.3	1.33	21.5	10.9	1.47	20.4	10.5	1.62	19.1	10.0	1.79	17.7	9.6	1.97
	75	63	19.0	13.6	1.34	18.2	13.2	1.47	17.2	12.7	1.62	16.1	12.3	1.78	14.9	11.7	1.96
600	80	62	19.3	17.9	1.36	18.4	17.6	1.50	17.4	17.3	1.64	16.4	16.4	1.80	15.4	15.4	1.99
	80	67	20.9	15.0	1.36	19.9	14.6	1.50	18.9	14.1	1.65	17.7	13.6	1.81	16.3	13.1	1.99
	80	72	23.0	11.9	1.36	21.9	11.5	1.50	20.7	11.1	1.65	19.3	10.6	1.82	17.9	10.1	2.00
	75	63	19.5	14.5	1.36	18.5	14.0	1.50	17.5	13.6	1.64	16.4	13.1	1.81	15.2	12.5	1.99
675	80	62	19.6	19.1	1.39	18.8	18.7	1.52	17.9	17.9	1.67	17.0	17.0	1.84	15.9	15.9	2.01
	80	67	21.3	15.9	1.39	20.2	15.4	1.52	19.1	15.0	1.67	17.9	14.5	1.84	16.5	13.9	2.02
	80	72	23.3	12.5	1.38	22.1	12.1	1.53	20.9	11.7	1.68	19.4	11.2	1.85	18.0	10.7	2.03
	75	63	19.8	15.3	1.39	18.8	14.9	1.53	17.8	14.4	1.68	16.6	13.9	1.84	15.4	13.3	2.02

**PSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) (LOOSE COIL)**

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	23.9	21.4	1.60	22.8	21.0	1.77	21.6	20.5	1.96	20.4	19.8	2.17	19.0	19.0	2.41
	80	67	25.9	18.0	1.60	24.7	17.5	1.78	23.4	16.9	1.97	22.0	16.3	2.18	20.4	15.6	2.41
	80	72	28.3	14.4	1.60	27.0	14.0	1.78	25.5	13.5	1.97	23.9	12.9	2.19	22.0	12.2	2.42
	75	63	24.1	17.4	1.60	23.0	16.9	1.78	21.8	16.3	1.97	20.5	15.7	2.18	19.0	15.0	2.41
800	80	62	24.4	22.9	1.63	23.3	22.4	1.81	22.2	22.0	2.00	21.0	21.0	2.21	19.6	19.6	2.44
	80	67	26.3	19.1	1.63	25.1	18.6	1.81	23.8	18.0	2.00	22.3	17.4	2.22	20.6	16.7	2.45
	80	72	28.7	15.2	1.64	27.2	14.7	1.82	25.7	14.2	2.01	24.0	13.5	2.23	22.3	12.9	2.46
	75	63	24.6	18.5	1.64	23.4	17.9	1.81	22.2	17.4	2.00	20.8	16.7	2.21	19.3	16.0	2.45
900	80	62	25.0	24.4	1.67	23.9	23.7	1.85	22.8	22.7	2.04	21.5	21.5	2.25	20.1	20.1	2.48
	80	67	26.8	20.2	1.67	25.5	19.7	1.85	24.1	19.1	2.04	22.5	18.4	2.25	20.8	17.7	2.49
	80	72	28.9	15.9	1.67	27.5	15.4	1.86	26.0	14.8	2.05	24.3	14.2	2.26	22.5	13.5	2.50
	75	63	24.9	19.5	1.67	23.8	19.0	1.85	22.5	18.4	2.04	21.0	17.7	2.25	19.4	17.0	2.48

**PSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) (LOOSE COIL)**

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
800	80	62	28.7	24.9	1.95	27.5	24.5	2.15	26.2	24.0	2.36	24.7	23.2	2.61	23.0	22.4	2.89
	80	67	31.1	21.1	1.96	29.8	20.5	2.16	28.3	19.8	2.37	26.6	19.1	2.62	24.7	18.3	2.89
	80	72	33.9	17.1	1.97	32.4	16.5	2.17	30.7	15.9	2.38	28.8	15.3	2.63	26.8	14.5	2.90
	75	63	29.0	20.4	1.96	27.8	19.9	2.15	26.4	19.2	2.37	24.8	18.5	2.61	23.1	17.7	2.89
1000	80	62	29.9	27.9	2.03	28.6	27.3	2.22	27.2	26.8	2.44	25.7	25.6	2.68	24.1	24.0	2.96
	80	67	32.1	23.3	2.04	30.7	22.7	2.23	29.1	22.0	2.45	27.3	21.2	2.69	25.3	20.4	2.97
	80	72	34.6	18.5	2.04	33.1	17.9	2.24	31.4	17.3	2.46	29.5	16.6	2.70	27.2	15.8	2.98
	75	63	29.9	22.5	2.03	28.6	21.9	2.23	27.2	21.2	2.44	25.5	20.4	2.69	23.6	19.6	2.97
1200	80	62	30.8	30.3	2.11	29.6	29.4	2.30	28.2	28.2	2.52	26.7	26.7	2.76	24.9	24.9	3.04
	80	67	32.7	25.4	2.11	31.3	24.8	2.31	29.6	24.0	2.53	27.7	23.2	2.77	25.7	22.3	3.04
	80	72	35.1	19.8	2.12	33.6	19.2	2.32	31.8	18.6	2.54	29.8	17.8	2.78	27.6	17.0	3.06
	75	63	30.5	24.4	2.11	29.2	23.8	2.31	27.6	23.1	2.52	25.9	22.2	2.76	24.0	21.3	3.04

**PSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) (LOOSE COIL)**

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	36.0	31.9	2.42	34.5	31.3	2.66	32.7	30.6	2.93	30.8	29.5	3.23	28.6	28.4	3.58
	80	67	39.1	26.9	2.44	37.3	26.1	2.68	35.3	25.3	2.95	33.1	24.3	3.25	30.6	23.3	3.60
	80	72	42.5	21.7	2.46	40.5	21.0	2.70	38.2	20.2	2.97	35.8	19.3	3.27	33.1	18.3	3.61
	75	63	36.4	26.0	2.43	34.8	25.3	2.67	32.9	24.4	2.94	30.9	23.5	3.24	28.6	22.4	3.59
1200	80	62	36.9	34.1	2.48	35.3	33.4	2.72	33.5	32.8	2.99	31.5	31.4	3.29	29.5	29.4	3.64
	80	67	39.7	28.5	2.50	37.9	27.8	2.74	35.9	26.9	3.01	33.6	25.9	3.31	31.0	24.8	3.65
	80	72	43.0	22.8	2.52	41.0	22.1	2.76	38.8	21.2	3.03	36.2	20.3	3.33	33.5	19.3	3.67
	75	63	37.1	27.6	2.49	35.4	26.8	2.73	33.5	25.9	3.00	31.4	25.0	3.30	29.0	23.9	3.64
1350	80	62	37.7	36.2	2.54	36.1	35.3	2.78	34.2	34.2	3.05	32.3	32.3	3.35	30.2	30.2	3.71
	80	67	40.3	30.2	2.56	38.4	29.4	2.80	36.3	28.5	3.07	34.0	27.5	3.37	31.4	26.3	3.71
	80	72	43.5	23.8	2.58	41.5	23.1	2.82	39.1	22.2	3.09	36.6	21.3	3.39	33.7	20.2	3.73
	75	63	37.6	29.1	2.55	35.9	28.3	2.79	33.9	27.4	3.05	31.7	26.4	3.36	29.2	25.2	3.70

# 13 SEER + LOOSE COIL COOLING EXPANDED RATINGS (CONTINUED)

**PSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) (LOOSE COIL)**

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	43.4	38.0	2.71	41.5	37.2	2.97	39.2	36.4	3.26	36.7	35.1	3.59	34.1	33.8	3.97
	80	67	46.9	32.0	2.71	44.8	31.1	2.98	42.3	30.0	3.27	39.5	28.8	3.59	36.5	27.6	3.97
	80	72	51.1	25.9	2.72	48.7	25.0	2.98	45.9	24.0	3.27	42.7	22.9	3.60	39.3	21.6	3.97
	75	63	43.8	31.1	2.71	41.8	30.2	2.98	39.5	29.1	3.27	36.9	27.9	3.60	34.2	26.6	3.97
1400	80	62	44.5	40.7	2.77	42.3	39.8	3.04	40.1	39.1	3.33	37.6	37.5	3.66	35.0	35.0	4.03
	80	67	47.8	34.0	2.78	45.5	33.0	3.04	43.0	32.0	3.33	40.2	30.8	3.66	37.0	29.4	4.03
	80	72	51.7	27.2	2.79	49.1	26.3	3.05	46.3	25.2	3.34	43.2	24.0	3.66	39.8	22.8	4.04
	75	63	44.7	32.9	2.78	42.5	32.0	3.04	40.2	30.9	3.33	37.5	29.7	3.66	34.6	28.3	4.03
1575	80	62	45.3	43.2	2.84	43.3	42.3	3.10	40.9	40.9	3.39	38.5	38.5	3.72	35.9	35.9	4.09
	80	67	48.5	35.9	2.85	46.2	34.9	3.11	43.6	33.8	3.40	40.5	32.5	3.72	37.3	31.1	4.09
	80	72	52.2	28.4	2.85	49.7	27.4	3.11	46.8	26.4	3.41	43.6	25.2	3.73	40.1	23.9	4.10
	75	63	45.3	34.7	2.85	43.2	33.7	3.11	40.7	32.6	3.40	38.0	31.3	3.73	34.9	29.9	4.10

**PSH4BD048K with C6B(AH)-X48(C,U)-(C,D) (LOOSE COIL)**

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	43.1	32.6	3.11	41.5	31.9	3.44	39.8	31.3	3.83	37.8	30.3	4.27	35.6	29.4	4.80
	80	67	47.4	28.5	3.13	45.6	27.7	3.46	43.7	26.8	3.84	41.5	25.8	4.28	39.0	24.7	4.80
	80	72	52.1	24.2	3.15	50.2	23.4	3.48	48.0	22.5	3.86	45.7	21.6	4.30	43.0	20.5	4.82
	75	63	44.1	27.9	3.12	42.4	27.1	3.45	40.6	26.2	3.83	38.5	25.2	4.28	36.2	24.1	4.80
1600	80	62	45.7	36.3	3.20	44.0	35.6	3.53	42.0	35.2	3.91	39.8	34.1	4.35	37.4	32.9	4.87
	80	67	49.7	31.4	3.22	47.7	30.5	3.54	45.6	29.5	3.92	43.2	28.5	4.37	40.6	27.3	4.88
	80	72	54.8	26.1	3.24	52.7	25.2	3.57	50.3	24.3	3.95	47.7	23.3	4.39	44.7	22.2	4.90
	75	63	46.3	30.6	3.20	44.6	29.7	3.53	42.6	28.8	3.91	40.3	27.7	4.36	37.9	26.5	4.88
1800	80	62	47.6	40.0	3.28	45.7	39.4	3.61	43.6	38.6	3.99	41.3	37.4	4.43	38.7	36.1	4.95
	80	67	51.5	34.0	3.30	49.4	33.0	3.63	47.1	32.0	4.01	44.6	30.8	4.45	41.8	29.6	4.96
	80	72	56.6	27.8	3.32	54.3	26.9	3.65	51.7	25.9	4.03	48.8	24.9	4.47	45.5	23.8	4.97
	75	63	48.1	33.0	3.29	46.2	32.1	3.62	44.0	31.1	4.00	41.6	29.8	4.44	39.0	28.6	4.95

# 13 SEER + AHU COOLING EXPANDED RATINGS

**PSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(\*)-(A,B)**

**PSH4BD018K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)**

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62	19.1	16.9	1.21	18.2	16.6	1.34	17.2	16.2	1.49	16.2	15.7	1.65	15.2	15.2	1.82
	80	67	20.8	14.3	1.20	19.8	13.9	1.34	18.8	13.4	1.49	17.7	12.9	1.66	16.4	12.4	1.84
	80	72	22.9	11.4	1.21	21.8	11.1	1.35	20.6	10.6	1.50	19.4	10.2	1.66	18.0	9.7	1.84
	75	63	19.3	13.8	1.21	18.4	13.4	1.34	17.5	13.0	1.49	16.4	12.5	1.65	15.2	12.0	1.84
600	80	62	19.5	18.1	1.26	18.6	17.8	1.39	17.6	17.5	1.54	16.7	16.7	1.68	15.7	15.7	1.86
	80	67	21.2	15.1	1.25	20.2	14.7	1.39	19.1	14.3	1.54	17.9	13.8	1.71	16.6	13.2	1.89
	80	72	23.2	12.0	1.25	22.1	11.6	1.39	20.9	11.2	1.55	19.5	10.7	1.71	18.1	10.3	1.90
	75	63	19.7	14.6	1.26	18.7	14.2	1.39	17.7	13.8	1.54	16.6	13.3	1.70	15.4	12.7	1.89
675	80	62	19.7	19.2	1.32	19.0	18.9	1.42	18.1	18.1	1.57	17.2	17.2	1.73	16.1	16.1	1.91
	80	67	21.4	16.0	1.32	20.3	15.5	1.45	19.2	15.1	1.61	18.0	14.5	1.77	16.6	14.0	1.95
	80	72	23.4	12.6	1.31	22.3	12.1	1.45	21.0	11.7	1.61	19.5	11.2	1.78	18.1	10.7	1.96
	75	63	19.9	15.4	1.32	18.9	15.0	1.46	17.9	14.5	1.61	16.7	14.0	1.77	15.5	13.4	1.95

**PSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(\*)-(A,B)**

**PSH4BD024K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)**

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62	24.2	21.6	1.52	23.1	21.2	1.70	21.9	20.8	1.89	20.6	20.1	2.10	19.4	19.4	2.30
	80	67	26.1	18.2	1.52	25.0	17.6	1.70	23.7	17.1	1.89	22.2	16.5	2.10	20.6	15.8	2.33
	80	72	28.6	14.6	1.52	27.3	14.1	1.70	25.8	13.6	1.90	24.1	13.0	2.11	22.3	12.4	2.34
	75	63	24.4	17.6	1.52	23.3	17.1	1.70	22.1	16.5	1.89	20.8	15.9	2.10	19.3	15.3	2.33
800	80	62	24.5	23.0	1.61	23.4	22.5	1.78	22.3	22.1	1.97	21.2	21.2	2.14	19.9	19.9	2.37
	80	67	26.4	19.2	1.60	25.2	18.7	1.78	23.9	18.1	1.97	22.4	17.5	2.19	20.7	16.8	2.42
	80	72	28.8	15.3	1.61	27.3	14.8	1.79	25.8	14.2	1.98	24.2	13.6	2.19	22.4	12.9	2.43
	75	63	24.7	18.5	1.61	23.5	18.0	1.78	22.3	17.4	1.97	20.9	16.8	2.18	19.4	16.1	2.42
900	80	62	24.8	24.2	1.71	23.9	23.7	1.83	22.8	22.8	2.02	21.6	21.6	2.23	20.2	20.2	2.46
	80	67	26.6	20.1	1.71	25.3	19.6	1.89	23.9	19.0	2.08	22.4	18.3	2.29	20.7	17.6	2.52
	80	72	28.7	15.8	1.71	27.4	15.3	1.89	25.9	14.7	2.09	24.2	14.1	2.30	22.3	13.4	2.53
	75	63	24.8	19.4	1.71	23.6	18.9	1.89	22.3	18.3	2.08	20.9	17.6	2.29	19.3	16.8	2.52



# 13 SEER + AHU COOLING EXPANDED RATINGS (CONTINUED)

PSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + MB6B(\*)-(A,B,C)

PSH4BD030K with PAH2BMX30K(A,B), or B5BM-X30K-(A,B), or GB5BM-030K-(A,B)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
875	80	62	29.0	25.9	2.03	27.8	25.4	2.23	26.4	24.9	2.44	24.9	24.0	2.69	23.2	23.1	2.96
	80	67	31.4	21.8	2.04	30.0	21.2	2.24	28.5	20.6	2.45	26.8	19.8	2.69	24.8	19.0	2.97
	80	72	34.0	17.6	2.04	32.5	17.0	2.25	30.8	16.4	2.46	28.9	15.7	2.70	26.8	14.9	2.98
	75	63	29.2	21.1	2.04	28.0	20.5	2.23	26.6	19.9	2.45	25.0	19.1	2.69	23.1	18.3	2.97
1000	80	62	29.3	27.3	2.21	28.0	26.7	2.40	26.6	26.3	2.62	25.3	25.3	2.78	23.7	23.7	3.05
	80	67	31.5	22.8	2.21	30.1	22.2	2.41	28.5	21.6	2.62	26.7	20.8	2.87	24.7	19.9	3.14
	80	72	34.0	18.2	2.22	32.5	17.6	2.42	30.8	17.0	2.63	28.8	16.2	2.88	26.6	15.4	3.15
	75	63	29.3	22.0	2.21	28.0	21.4	2.41	26.6	20.7	2.62	24.9	20.0	2.86	23.0	19.1	3.14
1125	80	62	29.3	28.4	2.43	28.0	27.8	2.62	27.0	27.0	2.72	25.6	25.5	2.97	23.8	23.8	3.24
	80	67	31.4	23.7	2.43	29.9	23.1	2.63	28.3	22.4	2.84	26.5	21.6	3.08	24.4	20.6	3.36
	80	72	33.8	18.7	2.44	32.3	18.1	2.64	30.5	17.4	2.85	28.5	16.7	3.09	26.3	15.8	3.37
	75	63	29.1	22.8	2.43	27.9	22.2	2.63	26.3	21.4	2.84	24.6	20.6	3.08	22.7	19.7	3.36

PSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + MB6B(\*)-(B,C)

PSH4BD036K with PAH2BMX36K(B,C), or B5BM-X36K-B, or GB5BM-036K-B

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62	36.2	32.0	2.38	34.6	31.4	2.62	32.9	30.7	2.89	30.9	29.7	3.19	28.8	28.5	3.54
	80	67	39.2	27.0	2.40	37.4	26.2	2.64	35.5	25.4	2.90	33.3	24.4	3.21	30.8	23.4	3.55
	80	72	42.6	21.8	2.42	40.7	21.1	2.66	38.3	20.3	2.92	36.0	19.4	3.23	33.3	18.4	3.57
	75	63	36.5	26.1	2.38	34.9	25.4	2.63	33.1	24.5	2.89	31.0	23.6	3.20	28.7	22.6	3.54
1200	80	62	36.7	33.9	2.54	35.1	33.2	2.78	33.3	32.6	3.05	31.5	31.5	3.28	29.5	29.5	3.63
	80	67	39.5	28.4	2.56	37.7	27.6	2.80	35.7	26.8	3.07	33.4	25.8	3.36	30.8	24.7	3.71
	80	72	42.8	22.7	2.58	40.8	22.0	2.82	38.6	21.1	3.09	36.0	20.2	3.38	33.3	19.2	3.73
	75	63	36.9	27.5	2.55	35.2	26.7	2.79	33.3	25.8	3.05	31.2	24.8	3.36	28.8	23.7	3.70
1350	80	62	37.0	35.5	2.75	35.4	34.6	2.99	33.8	33.8	3.15	31.9	31.9	3.46	29.8	29.8	3.81
	80	67	39.6	29.6	2.76	37.8	28.8	3.00	35.6	27.9	3.27	33.3	26.9	3.57	30.7	25.8	3.91
	80	72	42.8	23.5	2.78	40.8	22.7	3.02	38.5	21.8	3.29	35.9	20.9	3.59	33.0	19.8	3.93
	75	63	36.9	28.6	2.75	35.2	27.7	2.99	33.2	26.8	3.26	31.0	25.8	3.56	28.6	24.6	3.90

PSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + MB6B(\*)-(B,C)

PSH4BD042K with PAH2BMX42KB, or B5BM-X42K-B, or GB5BM-042K-B

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	43.6	38.2	2.63	41.7	37.5	2.89	39.5	36.7	3.18	37.0	35.3	3.51	34.4	34.0	3.89
	80	67	47.2	32.2	2.63	45.0	31.3	2.90	42.6	30.2	3.19	39.8	29.0	3.51	36.8	27.8	3.89
	80	72	51.4	26.0	2.64	49.0	25.1	2.90	46.2	24.2	3.19	43.0	23.1	3.52	39.6	21.8	3.89
	75	63	44.1	31.3	2.63	42.1	30.4	2.90	39.8	29.3	3.19	37.2	28.1	3.52	34.4	26.8	3.89
1400	80	62	44.4	40.6	2.81	42.2	39.7	3.06	40.0	39.0	3.36	37.5	37.4	3.69	35.1	35.1	4.00
	80	67	47.7	34.0	2.81	45.4	33.0	3.07	42.9	31.9	3.36	40.1	30.7	3.69	36.9	29.3	4.06
	80	72	51.6	27.2	2.81	49.0	26.2	3.07	46.3	25.2	3.36	43.1	24.0	3.69	39.7	22.7	4.06
	75	63	44.6	32.9	2.81	42.4	31.9	3.07	40.1	30.8	3.36	37.5	29.6	3.69	34.5	28.2	4.06
1575	80	62	44.7	42.7	3.02	42.7	41.7	3.28	40.5	40.5	3.50	38.2	38.2	3.83	35.5	35.5	4.20
	80	67	47.9	35.5	3.03	45.6	34.5	3.29	42.9	33.3	3.58	39.9	32.0	3.90	36.7	30.6	4.27
	80	72	51.6	28.1	3.03	49.1	27.1	3.29	46.2	26.0	3.58	43.0	24.8	3.91	39.5	23.5	4.27
	75	63	44.7	34.2	3.03	42.6	33.2	3.29	40.1	32.1	3.58	37.3	30.8	3.91	34.3	29.4	4.28

PSH4BD048K with C6B(A,H)-X48(C,U)-C + MB6B(\*)-C

PSH4BD048K with PAH2BMX48KC, or B5BM-X48K-C, or GB5BM-048K-C

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	49.7	43.5	3.23	47.6	42.7	3.55	45.3	41.9	3.92	42.7	40.5	4.35	39.8	39.1	4.83
	80	67	53.7	36.7	3.25	51.4	35.7	3.57	48.8	34.5	3.94	45.9	33.3	4.36	42.6	31.9	4.84
	80	72	58.5	29.7	3.27	55.9	28.8	3.59	52.7	27.7	3.95	49.4	26.5	4.38	45.9	25.1	4.85
	75	63	50.1	35.6	3.24	48.0	34.6	3.56	45.6	33.5	3.93	42.9	32.2	4.35	39.9	30.8	4.84
1600	80	62	50.6	46.3	3.41	48.4	45.4	3.73	46.0	44.7	4.10	43.3	42.9	4.52	40.6	40.5	4.96
	80	67	54.3	38.7	3.43	52.0	37.6	3.75	49.2	36.5	4.11	46.2	35.1	4.53	42.8	33.7	5.01
	80	72	58.6	31.0	3.45	56.0	30.0	3.77	53.0	28.8	4.13	49.7	27.6	4.55	46.0	26.2	5.02
	75	63	50.8	37.4	3.41	48.5	36.4	3.73	46.0	35.2	4.10	43.2	33.9	4.53	40.0	32.4	5.01
1800	80	62	51.0	48.7	3.63	48.8	47.7	3.95	46.5	46.5	4.26	44.0	44.0	4.68	41.3	41.2	5.17
	80	67	54.7	40.5	3.65	52.2	39.4	3.97	49.4	38.1	4.33	46.2	36.8	4.75	42.7	35.2	5.23
	80	72	58.8	32.0	3.67	56.2	31.0	3.98	53.1	29.8	4.35	49.7	28.5	4.76	46.0	27.1	5.24
	75	63	51.0	39.1	3.64	48.7	38.0	3.96	46.1	36.7	4.33	43.2	35.3	4.75	39.9	33.8	5.23

# 13 SEER + AHU COOLING EXPANDED RATINGS (CONTINUED)

PSH4BD060K with PAH2BMX60KC, or B5BM-X60K-C, or GB5BM-060K-C

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1750	80	62	54.5	41.2	3.63	52.3	40.4	4.06	49.9	39.5	4.54	47.2	38.1	5.08	43.9	36.5	5.73
	80	67	59.9	36.1	3.66	57.3	34.9	4.09	54.6	33.8	4.57	51.6	32.5	5.11	47.7	30.9	5.77
	80	72	65.6	30.5	3.70	62.9	29.3	4.13	60.2	28.2	4.61	56.8	26.9	5.15	52.4	25.4	5.81
	75	63	55.8	35.3	3.64	53.6	34.2	4.06	51.0	33.0	4.54	48.1	31.7	5.09	44.5	30.2	5.73
2000	80	62	57.7	45.9	3.73	55.2	44.9	4.16	52.5	44.2	4.64	49.6	42.8	5.18	46.1	40.6	5.83
	80	67	62.7	39.7	3.76	59.9	38.5	4.19	57.0	37.2	4.67	53.6	35.8	5.21	49.4	34.1	5.87
	80	72	69.4	32.8	3.81	66.2	31.7	4.24	62.7	30.5	4.71	59.0	29.2	5.25	54.2	27.5	5.91
2250	75	63	58.6	38.8	3.74	56.0	37.6	4.17	53.3	36.3	4.64	50.2	34.8	5.18	46.3	33.1	5.83
	80	62	59.9	50.3	3.87	57.3	49.4	4.30	54.4	48.3	4.77	51.3	46.6	5.31	47.2	44.1	5.97
	80	67	64.7	42.8	3.90	61.8	41.5	4.32	58.7	40.1	4.80	55.2	38.7	5.35	50.8	36.8	6.01
	80	72	71.1	35.0	3.94	67.8	33.8	4.37	64.2	32.5	4.85	60.2	31.2	5.39	55.0	29.5	6.04
	75	63	60.6	41.7	3.87	57.9	40.4	4.30	54.9	39.0	4.77	51.7	37.5	5.32	47.6	35.7	5.97

PSH4BD018K with GB5BMM024K-(A,B)

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
500	80	62	17.7	14.0	1.06	16.9	13.9	1.19	16.0	13.9	1.32	15.1	13.6	1.47	14.19	13.95	1.64	13.42	13.19	1.82
	80	67	19.5	11.3	1.08	18.7	11.2	1.20	17.7	11.3	1.34	16.6	11.0	1.48	15.39	10.72	1.64	14.34	10.11	1.83
	80	72	21.6	8.8	1.10	20.7	8.8	1.23	19.7	8.9	1.36	18.7	8.7	1.51	17.45	8.50	1.67	16.05	8.60	1.85
	75	63	17.9	10.9	1.07	17.1	10.8	1.19	16.2	10.8	1.33	15.2	10.5	1.47	14.23	9.58	1.64	13.24	10.33	1.82
650	80	62	18.8	16.4	1.11	18.0	16.6	1.24	17.2	16.1	1.38	16.3	15.4	1.52	15.31	14.79	1.69	14.39	14.27	1.87
	80	67	20.5	12.9	1.13	19.6	13.2	1.26	18.5	12.9	1.39	17.4	12.7	1.53	16.17	12.57	1.69	14.86	12.74	1.88
	80	72	22.6	9.8	1.16	21.6	10.2	1.28	20.6	9.9	1.42	19.4	9.8	1.56	18.13	9.84	1.72	16.61	9.79	1.90
800	75	63	18.9	12.4	1.11	18.0	12.7	1.24	17.0	12.3	1.37	15.8	12.0	1.52	14.76	11.92	1.68	13.75	12.14	1.87
	80	62	20.0	18.2	1.17	19.2	17.9	1.29	18.3	17.1	1.43	17.4	16.5	1.58	16.33	15.77	1.74	15.07	15.01	1.92
	80	67	21.1	14.5	1.18	20.1	14.7	1.30	19.1	14.3	1.44	18.0	14.6	1.58	16.70	14.47	1.74	15.14	14.32	1.92
	80	72	23.2	11.0	1.22	22.1	11.2	1.34	21.0	10.9	1.47	19.8	10.8	1.61	18.47	10.72	1.77	17.02	10.74	1.95
	75	63	19.5	13.9	1.16	18.5	14.0	1.29	17.6	14.0	1.42	16.4	13.9	1.57	15.11	13.62	1.73	14.03	13.59	1.91

PSH4BD024K with GB5BMM024K-(A,B)

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
650	80	62	23.6	18.0	1.36	22.8	18.2	1.52	21.7	18.3	1.68	20.4	17.9	1.86	18.96	18.58	2.06	17.80	17.44	2.29
	80	67	26.0	15.0	1.38	24.9	14.9	1.53	23.7	15.0	1.70	22.4	14.6	1.88	21.00	14.26	2.08	19.37	13.10	2.30
	80	72	28.8	11.7	1.42	27.7	11.6	1.57	26.5	11.9	1.74	25.1	11.6	1.91	23.59	11.37	2.11	21.93	11.59	2.33
	75	63	23.9	14.5	1.37	23.0	14.3	1.52	21.8	14.4	1.68	20.5	14.0	1.86	19.00	12.63	2.06	17.76	13.57	2.29
800	80	62	24.8	20.7	1.42	23.8	21.1	1.57	22.6	20.6	1.74	21.5	20.2	1.92	20.36	19.67	2.12	18.95	18.79	2.34
	80	67	27.0	16.5	1.45	25.9	16.9	1.60	24.6	16.5	1.76	23.3	16.2	1.94	21.80	16.12	2.14	20.16	15.96	2.36
	80	72	29.8	12.7	1.49	28.6	13.3	1.64	27.2	12.9	1.80	25.7	12.8	1.98	23.93	12.77	2.17	22.26	12.71	2.38
950	75	63	24.9	15.9	1.42	23.9	16.3	1.57	22.7	15.8	1.74	21.4	15.5	1.92	19.84	15.29	2.11	18.18	15.01	2.34
	80	62	25.7	23.2	1.48	24.8	23.1	1.63	23.8	22.2	1.80	22.7	21.5	1.98	21.39	20.67	2.18	20.00	19.91	2.41
	80	67	27.7	18.2	1.51	26.5	18.4	1.66	25.3	17.9	1.82	23.8	17.7	2.00	22.30	17.51	2.19	20.70	17.90	2.41
	80	72	30.3	14.0	1.55	28.9	14.2	1.70	27.5	13.8	1.86	26.1	13.7	2.03	24.46	13.57	2.23	22.74	13.61	2.44
	75	63	25.6	17.5	1.48	24.5	17.6	1.63	23.3	17.1	1.79	21.9	16.9	1.97	20.43	17.03	2.17	18.53	16.73	2.39

PSH4BD030K with GB5BMM030K-(A,B)

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
950	80	62	29.4	24.3	1.81	28.3	24.2	1.98	27.0	24.3	2.17	25.7	23.9	2.38	24.53	24.11	2.64	23.11	22.72	2.92
	80	67	32.2	19.2	1.86	30.9	19.1	2.04	29.5	19.3	2.22	28.0	18.9	2.43	26.42	18.63	2.67	24.64	17.63	2.95
	80	72	35.4	14.8	1.93	34.0	14.7	2.10	32.6	15.0	2.29	31.0	14.7	2.50	29.31	14.52	2.74	27.45	14.86	3.02
	75	63	29.7	18.6	1.82	28.5	18.4	1.98	27.2	18.6	2.17	25.8	18.1	2.39	24.15	16.47	2.63	22.39	17.81	2.91
1100	80	62	30.3	26.5	1.88	29.1	27.0	2.05	28.2	26.2	2.24	27.0	25.5	2.46	25.64	24.77	2.71	24.15	23.94	2.99
	80	67	32.9	20.6	1.94	31.5	21.2	2.10	30.1	20.7	2.29	28.6	20.5	2.49	26.95	20.48	2.73	25.11	20.41	3.01
	80	72	36.1	15.6	2.01	34.7	16.4	2.18	33.2	15.9	2.36	31.6	15.8	2.57	29.80	15.91	2.81	27.90	16.00	3.09
1250	75	63	30.4	19.9	1.88	29.2	20.4	2.05	27.8	19.9	2.24	26.3	19.6	2.45	24.67	19.48	2.69	22.95	19.95	2.97
	80	62	31.4	28.5	1.96	30.4	28.3	2.13	29.2	27.2	2.32	27.9	26.5	2.53	26.51	25.62	2.78	24.97	24.87	3.06
	80	67	33.4	22.3	2.00	32.1	22.5	2.17	30.6	22.0	2.35	29.0	22.0	2.56	27.32	21.81	2.80	25.52	22.67	3.08
	80	72	36.7	16.8	2.08	35.2	17.2	2.25	33.6	16.7	2.43	31.9	16.8	2.64	30.11	16.76	2.88	28.13	16.95	3.15
	75	63	30.9	21.4	1.95	29.6	21.6	2.11	28.3	21.1	2.30	26.7	20.9	2.51	25.11	21.48	2.75	23.29	21.44	3.03

# 13 SEER + AHU COOLING EXPANDED RATINGS (CONTINUED)

## PSH4BD036K with GB5BMM036K-B

CFM	O.D.T		65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1000	80	62	35.4	27.2	2.23	34.0	26.9	2.46	32.4	27.0	2.71	30.6	26.4	2.99	28.71	27.66	3.30	26.68	25.71	3.66
	80	67	38.9	22.6	2.30	37.4	22.4	2.52	35.7	22.6	2.77	33.9	22.2	3.05	31.87	21.76	3.37	29.74	19.70	3.73
	80	72	42.8	17.6	2.38	41.2	17.5	2.61	39.4	17.8	2.86	37.5	17.5	3.15	35.39	17.17	3.47	33.13	17.56	3.84
	75	63	36.0	21.9	2.24	34.5	21.7	2.47	32.9	21.8	2.72	31.1	21.3	2.99	29.20	19.30	3.31	27.08	20.85	3.67
1150	80	62	36.4	29.2	2.30	34.8	29.7	2.52	33.2	29.0	2.77	31.4	28.5	3.05	29.54	28.10	3.37	27.60	27.37	3.73
	80	67	39.8	24.1	2.37	38.2	24.8	2.59	36.5	24.2	2.84	34.6	23.9	3.12	32.55	23.82	3.45	30.30	23.72	3.80
	80	72	43.8	18.5	2.46	42.1	19.4	2.69	40.2	18.8	2.94	38.2	18.6	3.22	36.02	18.74	3.55	33.65	18.82	3.91
	75	63	36.9	23.3	2.32	35.4	23.9	2.53	33.7	23.2	2.78	31.8	22.9	3.06	29.80	22.70	3.38	27.66	22.49	3.73
1300	80	62	37.1	31.4	2.37	35.6	31.5	2.59	33.9	30.7	2.84	32.2	30.2	3.12	30.35	29.32	3.44	28.59	28.47	3.81
	80	67	40.6	25.9	2.44	38.9	26.2	2.66	37.1	25.6	2.91	35.2	25.5	3.19	33.04	25.25	3.51	30.77	25.28	3.87
	80	72	44.5	19.8	2.53	42.7	20.3	2.76	40.8	19.7	3.01	38.7	19.7	3.29	36.35	19.65	3.61	33.99	19.85	3.98
	75	63	37.6	25.0	2.38	36.0	25.2	2.60	34.2	24.5	2.85	32.4	24.3	3.13	30.29	24.03	3.44	28.09	23.78	3.79

## PSH4BD042K with GB5BMM042K-B

CFM	O.D.T		65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	41.6	34.3	2.63	39.9	34.0	2.84	37.9	34.0	3.10	35.8	33.0	3.39	33.51	32.94	3.73	31.23	30.70	4.11
	80	67	45.7	28.3	2.67	43.9	28.1	2.89	41.8	28.3	3.15	39.5	27.7	3.44	36.99	27.23	3.77	34.20	24.97	4.14
	80	72	50.2	21.6	2.75	48.2	21.5	2.97	46.0	21.9	3.22	43.6	21.5	3.51	40.90	21.12	3.84	38.10	21.50	4.21
	75	63	42.2	27.3	2.63	40.5	27.0	2.85	38.4	27.2	3.10	36.2	26.5	3.40	33.59	23.63	3.73	30.76	25.58	4.10
1550	80	62	42.3	36.1	2.69	40.6	36.6	2.91	38.7	35.5	3.16	36.6	34.5	3.46	34.54	33.37	3.80	32.26	31.99	4.18
	80	67	46.4	29.7	2.75	44.5	30.5	2.97	42.3	29.7	3.21	40.0	29.4	3.50	37.42	29.25	3.84	34.61	28.86	4.21
	80	72	50.7	22.5	2.82	48.7	23.5	3.04	46.4	22.8	3.29	44.0	22.6	3.58	41.32	22.67	3.91	38.49	22.68	4.28
	75	63	42.9	28.6	2.70	41.0	29.3	2.91	39.0	28.5	3.17	36.7	28.0	3.46	34.03	27.53	3.79	31.02	27.01	4.16
1700	80	62	43.0	38.0	2.76	41.3	38.0	2.98	39.3	36.7	3.23	37.5	35.6	3.53	35.38	34.19	3.87	33.10	32.96	4.25
	80	67	46.9	31.5	2.82	44.9	31.9	3.03	42.7	31.1	3.28	40.3	30.9	3.57	37.76	30.38	3.90	34.88	30.27	4.28
	80	72	51.1	23.8	2.89	49.1	24.3	3.11	46.8	23.6	3.36	44.3	23.6	3.65	41.67	23.48	3.98	38.80	23.66	4.35
	75	63	43.4	30.3	2.77	41.5	30.5	2.99	39.4	29.7	3.23	37.0	29.2	3.52	34.43	28.73	3.86	31.40	28.32	4.23

## PSH4BD048K with GB5BMM048K-(B,C)

CFM	O.D.T		65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1200	80	62	47.7	34.8	2.95	45.8	34.4	3.23	43.7	34.5	3.54	41.2	33.5	3.89	38.32	34.94	4.29	35.92	32.75	4.76
	80	67	52.4	29.2	3.02	50.4	28.9	3.30	48.2	29.2	3.61	45.7	28.5	3.97	43.03	27.88	4.37	39.90	25.20	4.82
	80	72	58.0	23.1	3.14	55.8	23.0	3.42	53.5	23.4	3.73	50.9	22.9	4.08	48.04	22.46	4.48	44.92	22.95	4.93
	75	63	48.4	28.3	2.96	46.5	28.0	3.24	44.3	28.1	3.55	41.9	27.3	3.90	38.85	24.77	4.29	36.36	26.63	4.76
1350	80	62	48.9	36.9	3.02	47.0	37.6	3.30	44.7	36.4	3.62	42.2	35.8	3.97	39.30	35.33	4.36	36.57	34.88	4.82
	80	67	53.6	30.7	3.10	51.6	31.6	3.38	49.3	30.7	3.70	46.8	30.3	4.05	43.94	30.14	4.44	40.89	29.91	4.90
	80	72	59.2	24.0	3.22	57.0	25.2	3.50	54.5	24.4	3.82	51.8	24.2	4.17	48.84	24.29	4.57	45.59	24.36	5.02
	75	63	49.6	29.7	3.03	47.7	30.5	3.32	45.4	29.6	3.63	42.9	29.0	3.98	40.04	28.69	4.37	36.95	28.26	4.83
1500	80	62	49.9	39.2	3.10	47.9	39.4	3.38	45.6	38.4	3.69	43.1	37.9	4.04	40.26	37.24	4.44	37.17	36.56	4.89
	80	67	54.7	32.6	3.18	52.6	33.1	3.46	50.2	32.2	3.77	47.6	32.0	4.12	44.72	31.59	4.52	41.59	31.54	4.97
	80	72	60.2	25.6	3.30	57.8	26.2	3.58	55.3	25.4	3.90	52.5	25.4	4.25	49.34	25.24	4.64	45.91	25.47	5.09
	75	63	50.6	31.6	3.11	48.6	31.9	3.39	46.3	30.9	3.70	43.7	30.6	4.05	40.89	30.10	4.45	37.45	29.69	4.89

## PSH4BD060K with GB5BMM060K-C

CFM	O.D.T		65°F			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1450	80	62	58.3	40.8	3.54	55.9	40.3	3.90	53.2	40.3	4.29	50.0	39.2	4.74	47.19	41.30	5.28	44.22	38.70	5.88
	80	67	64.2	34.5	3.67	61.7	34.1	4.02	58.9	34.4	4.43	55.9	33.5	4.89	52.57	32.80	5.40	48.85	29.84	5.97
	80	72	70.9	27.6	3.84	68.4	27.5	4.20	65.5	28.0	4.61	61.9	27.1	5.06	58.36	26.56	5.58	54.54	27.13	6.15
	75	63	59.3	33.6	3.56	56.9	33.1	3.92	54.2	33.2	4.31	51.0	32.2	4.77	47.89	29.38	5.29	44.84	31.59	5.89
1600	80	62	59.8	42.7	3.61	57.3	43.6	3.96	54.5	42.3	4.36	51.3	41.6	4.81	48.09	41.21	5.33	45.00	40.65	5.93
	80	67	65.7	35.9	3.74	63.1	37.0	4.10	60.3	35.8	4.50	57.2	35.3	4.96	53.74	35.15	5.48	49.96	34.88	6.04
	80	72	72.5	28.5	3.92	69.8	29.9	4.28	66.4	28.8	4.68	62.9	28.4	5.13	59.39	28.52	5.66	55.50	28.57	6.23
	75	63	60.7	34.9	3.63	58.2	35.8	3.98	55.4	34.6	4.38	52.4	33.9	4.84	48.70	33.45	5.34	45.58	33.24	5.94
1750	80	62	61.0	45.2	3.67	58.4	45.4	4.02	55.6	44.2	4.42	52.4	43.7	4.88	48.78	42.63	5.38	45.61	42.50	5.98
	80	67	67.0	37.9	3.81	64.3	38.3	4.17	61.4	37.2	4.57	58.2	37.0	5.03	54.74	36.54	5.54	51.00	36.53	6.11
	80	72	73.8	30.1	4.00	70.5	30.7	4.35	67.3	29.6	4.75	63.9	29.6	5.20	60.24	29.43	5.73	56.29	29.75	6.30
	75	63	61.9	36.8	3.69	59.4	37.1	4.04	56.5	35.9	4.44	53.3	35.5	4.90	49.78	34.80	5.40	46.26	34.65	5.98

# 13 SEER + VSB COOLING EXPANDED RATINGS

PSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + VSB

PSH4BD018K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

CFM	O.D.T			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.		T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
525	80	62		18.3	16.5	1.08	17.5	16.2	1.22	16.6	15.9	1.36	15.6	15.4	1.53	14.7	14.7	1.71
	80	67		19.9	13.9	1.08	19.0	13.5	1.22	18.0	13.1	1.37	16.9	12.6	1.53	15.7	12.2	1.72
	80	72		21.8	11.1	1.07	20.8	10.7	1.22	19.7	10.3	1.37	18.5	9.9	1.54	17.2	9.5	1.73
	75	63		18.5	13.5	1.08	17.7	13.1	1.22	16.8	12.7	1.37	15.7	12.2	1.53	14.6	11.7	1.72
600	80	62		18.7	17.8	1.10	17.9	17.4	1.24	17.1	17.1	1.37	16.2	16.2	1.54	15.2	15.2	1.73
	80	67		20.3	14.8	1.09	19.4	14.4	1.24	18.3	14.0	1.39	17.2	13.5	1.55	15.9	13.0	1.74
	80	72		22.2	11.7	1.10	21.2	11.3	1.24	20.0	10.9	1.39	18.7	10.5	1.56	17.3	10.0	1.75
	75	63		18.9	14.3	1.10	18.0	13.9	1.24	17.1	13.5	1.39	16.0	13.0	1.55	14.8	12.5	1.74
675	80	62		19.2	19.0	1.11	18.5	18.4	1.25	17.6	17.6	1.40	16.7	16.7	1.56	15.7	15.7	1.75
	80	67		20.6	15.7	1.12	19.6	15.3	1.26	18.6	14.9	1.42	17.4	14.4	1.58	16.1	13.9	1.77
	80	72		22.5	12.3	1.12	21.3	11.9	1.27	20.1	11.5	1.42	18.8	11.0	1.59	17.5	10.5	1.78
	75	63		19.2	15.1	1.12	18.3	14.7	1.26	17.3	14.3	1.41	16.2	13.8	1.58	15.0	13.3	1.77

PSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + VSB

PSH4BD024K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

CFM	O.D.T			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.		T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
700	80	62		23.2	21.2	1.36	22.2	20.8	1.54	21.0	20.4	1.73	19.8	19.7	1.94	18.7	18.7	2.16
	80	67		25.0	17.7	1.36	23.9	17.2	1.54	22.7	16.7	1.73	21.3	16.1	1.94	19.8	15.5	2.18
	80	72		27.3	14.1	1.35	26.0	13.7	1.54	24.6	13.2	1.74	23.1	12.7	1.95	21.3	12.1	2.19
	75	63		23.4	17.1	1.36	22.3	16.7	1.54	21.2	16.1	1.73	19.9	15.6	1.94	18.5	14.9	2.18
800	80	62		23.6	22.6	1.40	22.6	22.1	1.58	21.7	21.6	1.76	20.5	20.5	1.97	19.2	19.2	2.20
	80	67		25.4	18.8	1.40	24.2	18.3	1.58	22.9	17.8	1.78	21.5	17.2	1.99	20.0	16.5	2.23
	80	72		27.5	14.9	1.41	26.2	14.4	1.59	24.7	13.9	1.79	23.1	13.3	2.00	21.4	12.7	2.24
	75	63		23.7	18.2	1.40	22.6	17.7	1.58	21.4	17.1	1.77	20.1	16.5	1.99	18.7	15.9	2.23
900	80	62		24.2	23.9	1.44	23.3	23.1	1.61	22.2	22.2	1.80	20.9	20.9	2.01	19.6	19.6	2.25
	80	67		25.7	19.8	1.45	24.5	19.3	1.64	23.1	18.7	1.83	21.7	18.1	2.05	20.0	17.4	2.28
	80	72		27.6	15.5	1.45	26.2	15.0	1.65	24.8	14.5	1.84	23.3	13.9	2.06	21.6	13.2	2.30
	75	63		23.9	19.1	1.46	22.8	18.6	1.64	21.6	18.0	1.83	20.2	17.4	2.05	18.7	16.7	2.28

PSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + VSB

PSH4BD030K with PAH4VMX30K(A,B), or B4VM-X30K-(A,B)

CFM	O.D.T			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.		T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
800	80	62		29.4	25.8	1.73	28.0	25.3	1.93	26.6	24.8	2.15	25.0	24.0	2.39	23.3	23.2	2.67
	80	67		31.7	21.7	1.74	30.3	21.1	1.94	28.7	20.4	2.15	26.9	19.7	2.40	24.9	18.9	2.68
	80	72		34.4	17.4	1.74	32.8	16.8	1.94	31.1	16.2	2.16	29.1	15.5	2.41	26.9	14.7	2.69
	75	63		29.6	21.1	1.73	28.3	20.5	1.93	26.8	19.8	2.15	25.2	19.1	2.39	23.3	18.3	2.67
1000	80	62		30.4	28.9	1.82	29.1	28.3	2.02	27.8	27.7	2.21	26.2	26.2	2.45	24.5	24.5	2.73
	80	67		32.5	24.0	1.82	31.1	23.4	2.02	29.4	22.8	2.24	27.5	22.0	2.49	25.4	21.2	2.77
	80	72		35.2	18.9	1.84	33.5	18.3	2.04	31.7	17.7	2.26	29.6	16.9	2.50	27.2	16.1	2.78
	75	63		30.5	23.3	1.82	29.1	22.7	2.02	27.5	22.0	2.24	25.8	21.2	2.48	23.8	20.4	2.76
1200	80	62		31.5	31.0	1.90	30.2	30.0	2.10	28.8	28.7	2.32	27.1	27.1	2.57	25.2	25.2	2.84
	80	67		33.0	26.2	1.95	31.4	25.5	2.15	29.7	24.8	2.37	27.7	24.0	2.61	25.5	23.1	2.89
	80	72		35.5	20.2	1.96	33.8	19.6	2.16	31.9	18.9	2.38	29.7	18.1	2.62	27.3	17.3	2.90
	75	63		30.9	25.3	1.95	29.4	24.6	2.14	27.8	23.9	2.36	26.0	23.0	2.61	23.9	22.1	2.89

PSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + VSB

PSH4BD036K with PAH4VMX36KB, or B4VM-X36K-B

CFM	O.D.T			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.		T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1050	80	62		34.9	31.5	2.28	33.5	31.0	2.51	31.9	30.4	2.78	30.0	29.3	3.07	28.1	28.1	3.39
	80	67		37.9	26.5	2.30	36.2	25.8	2.53	34.3	25.0	2.79	32.3	24.1	3.09	29.9	23.2	3.43
	80	72		41.0	21.2	2.32	39.2	20.6	2.55	37.0	19.8	2.81	34.9	19.0	3.11	32.3	18.1	3.45
	75	63		35.3	25.6	2.28	33.7	24.9	2.52	32.0	24.2	2.78	30.1	23.3	3.08	27.9	22.3	3.41
1200	80	62		35.5	33.5	2.39	34.1	32.8	2.63	32.4	32.2	2.89	30.9	30.9	3.08	28.9	28.9	3.47
	80	67		38.2	28.0	2.41	36.5	27.3	2.64	34.6	26.5	2.90	32.4	25.6	3.20	30.0	24.6	3.53
	80	72		41.2	22.2	2.44	39.5	21.5	2.66	37.4	20.8	2.93	35.0	19.9	3.22	32.4	18.9	3.55
	75	63		35.7	27.1	2.40	34.1	26.4	2.63	32.3	25.5	2.89	30.3	24.6	3.19	28.0	23.6	3.52
1350	80	62		36.1	35.1	2.53	34.5	34.3	2.77	33.2	33.2	2.95	31.4	31.3	3.25	29.3	29.3	3.59
	80	67		38.4	29.4	2.55	36.7	28.6	2.78	34.7	27.8	3.04	32.5	26.9	3.34	30.0	25.8	3.68
	80	72		41.5	23.1	2.57	39.6	22.4	2.81	37.4	21.6	3.06	35.0	20.7	3.36	32.3	19.7	3.69
	75	63		35.8	28.3	2.54	34.2	27.6	2.77	32.4	26.8	3.03	30.3	25.8	3.33	28.0	24.7	3.67

# 13 SEER + VSB COOLING EXPANDED RATINGS (CONTINUED)

PSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + VSB  
 PSH4BD042K with PAH4VMX42K(B,C), or B4VM-X42K-(B,C)

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1225	80	62	42.1	37.6	2.52	40.3	37.0	2.77	38.3	36.2	3.06	35.9	34.9	3.38	33.6	33.5	3.72
	80	67	45.5	31.6	2.53	43.5	30.7	2.78	41.2	29.8	3.07	38.6	28.7	3.39	35.7	27.5	3.75
	80	72	49.4	25.3	2.53	47.2	24.5	2.79	44.5	23.6	3.07	41.7	22.6	3.39	38.5	21.4	3.76
	75	63	42.6	30.7	2.52	40.7	29.8	2.78	38.5	28.8	3.06	36.1	27.8	3.39	33.4	26.6	3.75
1400	80	62	43.0	40.1	2.64	41.0	39.2	2.89	38.9	38.5	3.18	36.8	36.8	3.46	34.4	34.4	3.83
	80	67	46.1	33.5	2.65	44.0	32.6	2.90	41.6	31.6	3.18	38.9	30.5	3.50	35.9	29.2	3.87
	80	72	49.8	26.6	2.66	47.5	25.7	2.91	44.9	24.8	3.19	41.9	23.7	3.51	38.6	22.5	3.87
	75	63	43.1	32.4	2.64	41.2	31.5	2.90	38.9	30.5	3.18	36.4	29.4	3.50	33.6	28.1	3.87
1575	80	62	43.6	42.2	2.79	41.6	41.3	3.04	39.7	39.7	3.28	37.5	37.5	3.60	34.9	34.9	3.96
	80	67	46.4	35.2	2.79	44.3	34.2	3.05	41.8	33.2	3.33	39.0	32.0	3.65	35.9	30.7	4.02
	80	72	50.0	27.6	2.80	47.7	26.7	3.06	45.0	25.8	3.34	42.0	24.6	3.66	38.6	23.4	4.02
	75	63	43.4	33.9	2.79	41.4	33.0	3.05	39.1	32.0	3.33	36.5	30.8	3.65	33.6	29.5	4.02

PSH4BD048K with C6B(A,H)-X48(C,U)-(C,D) + VSB  
 PSH4BD048K with PAH4VMX48K, or B4VM-X48K-C

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1400	80	62	43.7	33.1	2.82	42.2	32.5	3.14	40.4	31.9	3.52	38.5	30.9	3.95	36.4	30.0	4.47
	80	67	48.0	28.9	2.83	46.3	28.1	3.15	44.4	27.3	3.53	42.2	26.3	3.96	39.8	25.2	4.47
	80	72	52.7	24.5	2.85	50.8	23.7	3.17	48.7	22.8	3.54	46.4	21.9	3.97	43.8	20.9	4.47
	75	63	44.7	28.3	2.82	43.1	27.5	3.14	41.3	26.6	3.52	39.3	25.7	3.96	36.9	24.6	4.47
1600	80	62	46.4	37.0	2.87	44.7	36.3	3.20	42.8	36.0	3.57	40.6	34.9	4.01	38.3	33.7	4.52
	80	67	50.4	31.9	2.89	48.5	31.1	3.21	46.4	30.1	3.58	44.1	29.1	4.01	41.5	27.9	4.52
	80	72	55.5	26.4	2.91	53.4	25.6	3.23	51.1	24.7	3.60	48.5	23.7	4.02	45.6	22.7	4.52
	75	63	47.0	31.1	2.88	45.2	30.3	3.20	43.3	29.3	3.57	41.1	28.3	4.01	38.7	27.1	4.52
1800	80	62	48.3	40.7	2.95	46.4	40.2	3.27	44.4	39.4	3.65	42.1	38.3	4.08	39.6	37.0	4.59
	80	67	52.2	34.5	2.97	50.2	33.6	3.29	47.9	32.5	3.66	45.5	31.4	4.09	42.7	30.2	4.59
	80	72	57.3	28.1	2.99	55.0	27.3	3.30	52.5	26.4	3.67	49.7	25.4	4.10	46.5	24.2	4.59
	75	63	48.8	33.6	2.96	46.9	32.7	3.28	44.8	31.6	3.65	42.4	30.5	4.08	39.9	29.3	4.59

PSH4BD060K with C6B(A,H)-X60(C,U)-(C,D) + VSB  
 PSH4BD060K with PAH4VMX60K, or B4VM-X60K-C

O.D.T			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1750	80	62	54.5	41.2	3.63	52.3	40.4	4.06	49.9	39.5	4.54	47.2	38.1	5.08	43.9	36.5	5.73
	80	67	59.9	36.1	3.66	57.3	34.9	4.09	54.6	33.8	4.57	51.6	32.5	5.11	47.7	30.9	5.77
	80	72	65.6	30.5	3.70	62.9	29.3	4.13	60.2	28.2	4.61	56.8	26.9	5.15	52.4	25.4	5.81
	75	63	55.8	35.3	3.64	53.6	34.2	4.06	51.0	33.0	4.54	48.1	31.7	5.09	44.5	30.2	5.73
2000	80	62	57.7	45.9	3.73	55.2	44.9	4.16	52.5	44.2	4.64	49.6	42.8	5.18	46.1	40.6	5.83
	80	67	62.7	39.7	3.76	59.9	38.5	4.19	57.0	37.2	4.67	53.6	35.8	5.21	49.4	34.1	5.87
	80	72	69.4	32.8	3.81	66.2	31.7	4.24	62.7	30.5	4.71	59.0	29.2	5.25	54.2	27.5	5.91
	75	63	58.6	38.8	3.74	56.0	37.6	4.17	53.3	36.3	4.64	50.2	34.8	5.18	46.3	33.1	5.83
2250	80	62	59.9	50.3	3.87	57.3	49.4	4.30	54.4	48.3	4.77	51.3	46.6	5.31	47.2	44.1	5.97
	80	67	64.7	42.8	3.90	61.8	41.5	4.32	58.7	40.1	4.80	55.2	38.7	5.35	50.8	36.8	6.01
	80	72	71.1	35.0	3.94	67.8	33.8	4.37	64.2	32.5	4.85	60.2	31.2	5.39	55.0	29.5	6.04
	75	63	60.6	41.7	3.87	57.9	40.4	4.30	54.9	39.0	4.77	51.7	37.5	5.32	47.6	35.7	5.97

# 13 SEER + LOOSE COIL HEATING EXPANDED RATINGS

PSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) - LOOSE COIL

CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
500	60	10.0	2.18	1.34	11.8	2.54	1.36	12.5	2.69	1.37	15.0	3.18	1.39	17.6	3.66	1.41	19.4	3.98	1.43	20.1	4.12	1.43	22.7	4.56	1.46
	70	9.5	2.20	1.26	11.1	2.50	1.30	11.7	2.63	1.31	14.0	3.03	1.36	16.3	3.40	1.41	17.9	3.65	1.44	18.6	3.75	1.45	20.9	4.07	1.50
	80	8.9	2.16	1.20	10.3	2.43	1.24	10.9	2.53	1.26	12.9	2.88	1.32	15.0	3.19	1.38	16.4	3.39	1.42	17.0	3.48	1.44	19.1	3.74	1.49
600	60	10.0	2.12	1.39	11.8	2.48	1.40	12.6	2.63	1.41	15.2	3.12	1.43	17.8	3.60	1.45	19.6	3.93	1.46	20.4	4.07	1.47	23.0	4.52	1.49
	70	9.6	2.13	1.31	11.2	2.44	1.35	11.9	2.57	1.36	14.2	2.97	1.41	16.6	3.35	1.45	18.2	3.60	1.48	18.9	3.70	1.50	21.2	4.04	1.54
	80	9.0	2.12	1.24	10.5	2.38	1.29	11.1	2.49	1.31	13.2	2.83	1.37	15.3	3.14	1.43	16.8	3.34	1.47	17.4	3.42	1.49	19.5	3.68	1.55
700	60	10.2	2.09	1.43	12.0	2.44	1.45	12.8	2.59	1.45	15.4	3.09	1.47	18.0	3.57	1.48	19.9	3.90	1.49	20.6	4.04	1.50	23.3	4.50	1.51
	70	9.7	2.10	1.35	11.3	2.40	1.38	12.1	2.53	1.40	14.4	2.94	1.44	16.8	3.32	1.49	18.5	3.57	1.52	19.2	3.68	1.53	21.6	4.02	1.58
	80	9.1	2.08	1.29	10.6	2.34	1.33	11.2	2.44	1.35	13.3	2.77	1.41	15.5	3.07	1.48	16.9	3.27	1.52	17.6	3.35	1.54	19.7	3.60	1.60





# 13 SEER + AHU HEATING EXPANDED RATINGS

PSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(\*)-(A,B)

PSH4BD018K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

100 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
500	60	8.7	2.03	1.26	10.6	2.47	1.26	11.5	2.66	1.27	14.2	3.28	1.27	16.9	3.89	1.28	18.9	4.32	1.28	19.7	4.50	1.28	22.4	5.10	1.29
	70	8.2	2.07	1.17	10.0	2.46	1.19	10.7	2.62	1.20	13.2	3.15	1.23	15.7	3.65	1.26	17.4	3.99	1.28	18.2	4.13	1.29	20.6	4.58	1.32
	80	7.6	2.04	1.09	9.2	2.40	1.12	9.9	2.55	1.13	12.1	3.02	1.17	14.3	3.46	1.21	15.9	3.76	1.24	16.6	3.88	1.25	18.8	4.27	1.29
600	60	8.8	1.97	1.30	10.7	2.41	1.31	11.6	2.59	1.31	14.4	3.21	1.31	17.2	3.82	1.32	19.1	4.25	1.32	20.0	4.43	1.32	22.8	5.03	1.33
	70	8.3	2.00	1.22	10.1	2.39	1.24	10.9	2.55	1.25	13.4	3.08	1.28	15.9	3.58	1.31	17.7	3.91	1.33	18.5	4.06	1.33	21.0	4.52	1.36
	80	7.7	2.00	1.13	9.4	2.35	1.17	10.0	2.50	1.18	12.3	2.96	1.22	14.6	3.38	1.27	16.3	3.67	1.30	17.0	3.78	1.31	19.3	4.16	1.36
700	60	9.0	1.94	1.35	10.9	2.37	1.35	11.8	2.55	1.35	14.6	3.16	1.35	17.4	3.78	1.35	19.4	4.20	1.35	20.2	4.39	1.35	23.0	5.00	1.35
	70	8.4	1.96	1.26	10.2	2.35	1.28	11.0	2.51	1.29	13.6	3.03	1.32	16.2	3.53	1.34	18.0	3.87	1.36	18.8	4.01	1.37	21.4	4.47	1.40
	80	7.9	1.96	1.18	9.5	2.30	1.21	10.2	2.44	1.23	12.5	2.88	1.27	14.8	3.30	1.32	16.4	3.57	1.35	17.1	3.68	1.37	19.5	4.04	1.41

PSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + MB6B(\*)-(A,B)

PSH4BD024K with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B)

100 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
650	60	11.9	2.13	1.64	14.4	2.52	1.67	15.4	2.68	1.69	19.0	3.20	1.74	22.5	3.69	1.79	25.0	4.02	1.82	26.0	4.15	1.84	29.5	4.59	1.89
	70	11.4	2.07	1.61	13.7	2.42	1.66	14.6	2.56	1.68	17.9	3.00	1.75	21.2	3.41	1.82	23.5	3.68	1.87	24.5	3.79	1.89	27.8	4.14	1.97
	80	10.8	1.98	1.59	12.9	2.29	1.65	13.8	2.42	1.67	16.9	2.81	1.76	19.9	3.17	1.84	22.0	3.41	1.90	22.9	3.50	1.92	26.0	3.80	2.00
750	60	12.0	2.09	1.68	14.5	2.48	1.71	15.6	2.64	1.73	19.1	3.16	1.77	22.7	3.66	1.82	25.2	3.99	1.85	26.3	4.13	1.87	29.9	4.58	1.92
	70	11.5	2.04	1.65	13.8	2.38	1.70	14.8	2.52	1.72	18.1	2.97	1.79	21.5	3.39	1.86	23.8	3.66	1.91	24.8	3.77	1.93	28.1	4.13	2.00
	80	10.9	1.96	1.63	13.1	2.27	1.69	14.0	2.39	1.71	17.1	2.79	1.80	20.2	3.15	1.88	22.4	3.38	1.94	23.3	3.48	1.97	26.4	3.78	2.05
850	60	12.1	2.06	1.72	14.6	2.45	1.75	15.7	2.61	1.77	19.3	3.14	1.81	23.0	3.64	1.85	25.5	3.97	1.88	26.6	4.11	1.89	30.2	4.57	1.94
	70	11.6	2.01	1.69	13.9	2.36	1.74	15.0	2.50	1.76	18.3	2.95	1.82	21.7	3.37	1.89	24.1	3.65	1.94	25.1	3.76	1.96	28.5	4.13	2.03
	80	11.0	1.93	1.67	13.2	2.24	1.73	14.1	2.36	1.75	17.3	2.75	1.84	20.4	3.11	1.92	22.6	3.34	1.98	23.5	3.44	2.01	26.6	3.74	2.09

PSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + MB6B(\*)-(A,B,C)

PSH4BD030K with PAH2BMX30K(A,B), or B5BM-X30K-(A,B), or GB5BM-030K-(A,B)

100 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
700	60	15.2	2.25	1.98	18.1	2.60	2.05	19.4	2.74	2.08	23.5	3.18	2.17	27.7	3.59	2.26	30.5	3.85	2.33	31.8	3.96	2.35	35.9	4.30	2.45
	70	14.6	2.14	2.00	17.3	2.44	2.08	18.5	2.57	2.12	22.4	2.95	2.23	26.4	3.30	2.34	29.1	3.52	2.42	30.3	3.61	2.46	34.2	3.90	2.57
	80	14.0	2.01	2.04	16.6	2.28	2.13	17.7	2.39	2.17	21.4	2.73	2.29	25.1	3.04	2.42	27.7	3.23	2.51	28.8	3.31	2.55	32.4	3.56	2.67
800	60	15.3	2.22	2.02	18.2	2.57	2.08	19.5	2.71	2.11	23.7	3.16	2.20	27.9	3.57	2.29	30.9	3.85	2.35	32.1	3.96	2.38	36.3	4.31	2.47
	70	14.7	2.11	2.04	17.5	2.42	2.12	18.7	2.55	2.15	22.7	2.94	2.26	26.6	3.29	2.37	29.4	3.52	2.45	30.6	3.61	2.48	34.6	3.91	2.59
	80	14.1	1.99	2.08	16.8	2.27	2.17	17.9	2.38	2.20	21.6	2.72	2.33	25.4	3.03	2.45	28.0	3.23	2.54	29.1	3.31	2.58	32.9	3.57	2.70
900	60	15.4	2.19	2.06	18.4	2.54	2.12	19.6	2.68	2.14	23.9	3.14	2.23	28.1	3.56	2.32	31.1	3.84	2.38	32.4	3.95	2.40	36.6	4.32	2.49
	70	14.8	2.10	2.08	17.7	2.41	2.15	18.9	2.53	2.18	22.9	2.93	2.29	26.9	3.29	2.40	29.7	3.52	2.47	30.9	3.62	2.51	34.9	3.92	2.61
	80	14.3	1.98	2.11	16.9	2.25	2.20	18.0	2.36	2.24	21.8	2.71	2.36	25.6	3.02	2.48	28.2	3.22	2.57	29.3	3.30	2.61	33.1	3.56	2.73

PSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + MB6B(\*)-(B,C)

PSH4BD036K with PAH2BMX36K(B,C), or B5BM-X36K-B, or GB5BM-036K-B

150 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
950	60	19.2	2.52	2.24	22.6	2.83	2.34	24.0	2.96	2.38	28.8	3.35	2.52	33.6	3.70	2.67	37.0	3.92	2.77	38.4	4.01	2.81	43.2	4.29	2.96
	70	18.5	2.36	2.30	21.7	2.64	2.41	23.1	2.75	2.46	27.7	3.09	2.63	32.3	3.40	2.79	35.5	3.59	2.91	36.9	3.66	2.96	41.5	3.90	3.12
	80	18.0	2.22	2.38	21.0	2.46	2.50	22.3	2.56	2.56	26.7	2.86	2.74	31.1	3.12	2.92	34.1	3.29	3.04	35.4	3.35	3.10	39.8	3.56	3.28
1100	60	19.4	2.48	2.29	22.8	2.80	2.38	24.3	2.93	2.42	29.2	3.34	2.56	34.0	3.70	2.70	37.5	3.93	2.80	38.9	4.02	2.84	43.8	4.32	2.97
	70	18.7	2.33	2.35	22.0	2.62	2.46	23.4	2.73	2.51	28.1	3.09	2.67	32.7	3.40	2.82	36.0	3.60	2.93	37.4	3.68	2.98	42.1	3.93	3.14
	80	18.1	2.19	2.43	21.3	2.44	2.55	22.6	2.54	2.61	27.0	2.85	2.78	31.5	3.13	2.95	34.6	3.30	3.07	36.0	3.38	3.12	40.4	3.59	3.30
1250	60	19.5	2.44	2.34	23.0	2.77	2.43	24.4	2.90	2.47	29.4	3.32	2.60	34.4	3.69	2.73	37.9	3.93	2.83	39.4	4.03	2.87	44.3	4.33	3.00
	70	18.9	2.31	2.40	22.3	2.60	2.51	23.7	2.72	2.55	28.4	3.08	2.70	33.1	3.40	2.86	36.5	3.61	2.96	37.9	3.69	3.01	42.6	3.96	3.16
	80	18.3	2.17	2.48	21.5	2.42	2.60	22.8	2.53	2.65	27.3	2.85	2.82	31.8	3.13	2.98	35.0	3.31	3.10	36.3	3.38	3.15	40.8	3.61	3.32

# 13 SEER + AHU HEATING EXPANDED RATINGS (CONTINUED)

PSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + MB6B(\*)-(B,C)

PSH4BD042K with PAH2BMX42KB, or B5BM-X42K-B, or GB5BM-042K-B

150 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1175	60	22.3	2.53	2.58	26.2	2.87	2.68	27.9	3.01	2.72	33.5	3.44	2.86	39.1	3.83	3.00	43.0	4.08	3.09	44.7	4.18	3.13	50.2	4.51	3.27
	70	21.5	2.34	2.70	25.3	2.65	2.80	27.0	2.77	2.85	32.4	3.16	3.00	37.8	3.51	3.15	41.5	3.74	3.26	43.2	3.83	3.30	48.6	4.12	3.46
	80	21.0	2.18	2.83	24.6	2.45	2.95	26.2	2.57	2.99	31.4	2.91	3.16	36.5	3.23	3.32	40.2	3.43	3.43	41.7	3.51	3.48	46.9	3.77	3.65
1325	60	22.5	2.51	2.63	26.5	2.85	2.72	28.2	2.99	2.76	33.8	3.43	2.89	39.5	3.84	3.02	43.5	4.10	3.11	45.2	4.21	3.15	50.9	4.55	3.28
	70	21.8	2.33	2.74	25.6	2.64	2.84	27.2	2.77	2.89	32.7	3.16	3.03	38.2	3.53	3.17	42.0	3.76	3.28	43.6	3.86	3.32	49.1	4.16	3.46
	80	21.2	2.16	2.88	24.9	2.44	2.99	26.4	2.56	3.03	31.7	2.92	3.19	37.0	3.24	3.34	40.6	3.45	3.45	42.2	3.54	3.50	47.5	3.81	3.65
1475	60	22.5	2.47	2.67	26.6	2.82	2.76	28.3	2.97	2.80	34.1	3.42	2.92	39.9	3.83	3.05	43.9	4.10	3.14	45.6	4.21	3.18	51.4	4.56	3.30
	70	22.0	2.32	2.79	25.9	2.63	2.88	27.5	2.76	2.93	33.1	3.16	3.06	38.6	3.53	3.20	42.5	3.77	3.30	44.1	3.87	3.34	49.6	4.18	3.48
	80	21.4	2.15	2.92	25.1	2.43	3.03	26.7	2.55	3.07	32.0	2.91	3.22	37.3	3.25	3.37	41.0	3.47	3.47	42.6	3.55	3.52	47.9	3.83	3.67

PSH4BD048K with C6B(A,H)-X48(C,U)-C + MB6B(\*)-C

PSH4BD048K with PAH2BMX48KC, or B5BM-X48K-C, or GB5BM-048K-C

200 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1475	60	25.6	2.45	3.06	29.8	2.73	3.19	31.6	2.85	3.25	37.6	3.20	3.45	43.6	3.51	3.64	47.8	3.71	3.78	49.6	3.79	3.84	55.6	4.05	4.03
	70	24.7	2.23	3.24	28.8	2.49	3.39	30.6	2.60	3.45	36.4	2.92	3.66	42.3	3.21	3.86	46.4	3.39	4.01	48.1	3.47	4.07	54.0	3.70	4.28
	80	24.2	2.06	3.45	28.1	2.29	3.61	29.8	2.38	3.67	35.5	2.67	3.89	41.1	2.93	4.11	45.0	3.09	4.27	46.7	3.16	4.33	52.3	3.37	4.55
1675	60	25.8	2.44	3.10	30.1	2.73	3.23	31.9	2.85	3.29	38.1	3.22	3.47	44.2	3.55	3.65	48.5	3.76	3.78	50.3	3.85	3.84	56.4	4.12	4.02
	70	25.0	2.23	3.29	29.2	2.50	3.43	31.0	2.61	3.48	36.9	2.94	3.68	42.8	3.25	3.87	47.0	3.44	4.01	48.8	3.52	4.06	54.7	3.77	4.26
	80	24.4	2.04	3.50	28.5	2.29	3.65	30.2	2.39	3.71	35.9	2.69	3.91	41.6	2.97	4.12	45.7	3.15	4.26	47.4	3.22	4.32	53.1	3.44	4.52
1875	60	25.9	2.41	3.15	30.3	2.71	3.27	32.2	2.84	3.33	38.4	3.22	3.50	44.7	3.56	3.68	49.1	3.78	3.81	50.9	3.87	3.86	57.2	4.15	4.04
	70	25.4	2.23	3.34	29.6	2.50	3.47	31.4	2.61	3.52	37.4	2.96	3.71	43.4	3.27	3.89	47.6	3.47	4.02	49.4	3.55	4.08	55.4	3.81	4.26
	80	24.7	2.04	3.55	28.8	2.29	3.69	30.5	2.39	3.74	36.3	2.71	3.94	42.1	2.99	4.13	46.2	3.18	4.26	47.9	3.25	4.32	53.7	3.49	4.51

PSH4BD060K with PAH2BMX60KC, or B5BM-X60K-C, or GB5BM-060K-C

200 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1650	60	33.7	2.68	3.69	37.8	2.88	3.86	39.6	2.96	3.93	45.6	3.21	4.17	51.6	3.43	4.42	55.8	3.57	4.59	57.6	3.63	4.66	63.6	3.80	4.90
	70	32.7	2.41	3.97	36.8	2.60	4.15	38.5	2.68	4.22	44.4	2.91	4.47	50.3	3.12	4.72	54.4	3.26	4.89	56.1	3.31	4.96	62.0	3.49	5.21
	80	32.2	2.21	4.28	36.2	2.38	4.46	37.8	2.44	4.54	43.5	2.66	4.80	49.1	2.84	5.06	53.0	2.97	5.24	54.7	3.02	5.32	60.4	3.17	5.58
1850	60	34.0	2.68	3.72	38.2	2.89	3.88	40.0	2.98	3.95	46.1	3.24	4.18	52.2	3.48	4.41	56.5	3.63	4.57	58.3	3.69	4.63	64.4	3.88	4.86
	70	33.0	2.42	4.00	37.2	2.62	4.16	39.0	2.70	4.23	44.9	2.95	4.46	50.8	3.17	4.70	55.0	3.32	4.86	56.8	3.38	4.93	62.7	3.56	5.16
	80	32.4	2.20	4.31	36.5	2.39	4.48	38.2	2.46	4.55	43.9	2.69	4.79	49.7	2.89	5.03	53.7	3.03	5.20	55.4	3.08	5.27	61.2	3.25	5.51
2050	60	33.9	2.65	3.75	38.3	2.88	3.91	40.2	2.97	3.97	46.5	3.25	4.20	52.7	3.50	4.42	57.1	3.66	4.58	59.0	3.72	4.64	65.2	3.93	4.87
	70	33.4	2.43	4.04	37.6	2.63	4.19	39.4	2.71	4.26	45.4	2.97	4.48	51.4	3.21	4.70	55.6	3.36	4.85	57.4	3.42	4.92	63.4	3.62	5.14
	80	32.7	2.21	4.35	36.8	2.40	4.51	38.6	2.47	4.57	44.4	2.71	4.80	50.2	2.93	5.02	54.2	3.07	5.18	56.0	3.13	5.24	61.8	3.32	5.47

PSH4BD018K with GB5BMM024K-(A,B)

100 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
545	60	9.2	2.02	1.33	11.4	2.40	1.40	12.4	2.55	1.42	15.6	3.01	1.52	18.8	3.42	1.61	21.0	3.68	1.68	22.0	3.78	1.71	25.2	4.11	1.80
	70	8.7	2.03	1.25	10.7	2.35	1.34	11.6	2.47	1.38	14.6	2.84	1.50	17.5	3.16	1.63	19.6	3.35	1.71	20.5	3.43	1.75	23.4	3.66	1.88
	80	8.0	1.98	1.19	9.9	2.26	1.29	10.8	2.36	1.34	13.5	2.67	1.48	16.2	2.93	1.62	18.1	3.08	1.72	18.9	3.14	1.76	21.6	3.32	1.91
645	60	9.2	1.96	1.37	11.5	2.34	1.44	12.5	2.50	1.47	15.7	2.97	1.56	19.0	3.38	1.65	21.3	3.65	1.71	22.3	3.76	1.74	25.6	4.10	1.83
	70	8.8	1.97	1.30	10.9	2.29	1.39	11.8	2.42	1.43	14.8	2.80	1.55	17.8	3.13	1.67	19.9	3.33	1.75	20.8	3.41	1.79	23.8	3.65	1.91
	80	8.2	1.94	1.23	10.1	2.22	1.34	10.9	2.33	1.38	13.7	2.64	1.52	16.5	2.90	1.67	18.4	3.06	1.77	19.3	3.12	1.81	22.1	3.30	1.96
745	60	9.4	1.94	1.42	11.7	2.31	1.48	12.7	2.47	1.51	16.0	2.94	1.59	19.2	3.36	1.68	21.5	3.63	1.74	22.5	3.74	1.77	25.8	4.09	1.85
	70	8.9	1.93	1.34	11.0	2.26	1.43	11.9	2.39	1.46	15.0	2.78	1.58	18.0	3.11	1.70	20.2	3.31	1.79	21.1	3.40	1.82	24.2	3.65	1.94
	80	8.3	1.91	1.28	10.3	2.18	1.38	11.1	2.29	1.42	13.9	2.60	1.57	16.7	2.86	1.71	18.6	3.01	1.81	19.5	3.08	1.86	22.3	3.26	2.00





# 13 SEER + AHU HEATING EXPANDED RATINGS (CONTINUED)

## PSH4BD060K with GB5BMM060K-C

200 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
1400	60	30.3	2.29	3.88	36.4	2.56	4.17	39.0	2.67	4.29	47.7	2.97	4.70	56.4	3.23	5.12	62.5	3.39	5.41	65.1	3.45	5.53	73.8	3.64	5.94
	70	29.4	2.05	4.20	35.4	2.30	4.50	37.9	2.40	4.63	46.5	2.69	5.06	55.0	2.94	5.49	61.0	3.09	5.79	63.6	3.15	5.92	72.1	3.33	6.34
	80	28.9	1.87	4.54	34.7	2.10	4.86	37.2	2.18	5.00	45.6	2.45	5.46	53.9	2.67	5.92	59.7	2.81	6.24	62.3	2.86	6.38	70.6	3.03	6.84
1600	60	30.6	2.30	3.91	36.8	2.58	4.18	39.4	2.69	4.30	48.2	3.01	4.69	57.0	3.29	5.09	63.2	3.46	5.36	65.8	3.52	5.48	74.6	3.73	5.87
	70	29.7	2.07	4.22	35.8	2.33	4.50	38.4	2.43	4.63	47.0	2.74	5.03	55.6	3.00	5.44	61.7	3.16	5.73	64.3	3.22	5.85	72.9	3.42	6.26
	80	29.1	1.87	4.57	35.0	2.11	4.87	37.6	2.20	5.00	46.0	2.49	5.43	54.5	2.73	5.86	60.4	2.88	6.16	62.9	2.94	6.28	71.4	3.12	6.71
1800	60	30.6	2.28	3.93	36.9	2.57	4.20	39.6	2.69	4.32	48.6	3.03	4.70	57.5	3.31	5.09	63.8	3.49	5.36	66.5	3.56	5.48	75.5	3.77	5.86
	70	30.1	2.07	4.26	36.2	2.34	4.53	38.8	2.45	4.65	47.5	2.76	5.04	56.2	3.04	5.43	62.3	3.20	5.70	64.9	3.27	5.82	73.6	3.48	6.21
	80	29.4	1.87	4.60	35.4	2.12	4.89	37.9	2.22	5.01	46.5	2.52	5.41	55.0	2.77	5.82	61.0	2.93	6.10	63.5	2.99	6.23	72.0	3.19	6.63

# 13 SEER + VSB HEATING EXPANDED RATINGS

## PSH4BD018K with C6B(A,H)-X24(C,U)-(A,B) + VSB PSH4BD018K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

100 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
500	60	9.0	1.99	1.33	10.9	2.40	1.34	11.8	2.57	1.34	14.5	3.14	1.35	17.2	3.70	1.37	19.2	4.09	1.37	20.0	4.25	1.38	22.7	4.80	1.39
	70	8.5	2.00	1.25	10.3	2.36	1.27	11.0	2.51	1.29	13.5	2.99	1.32	16.0	3.45	1.36	17.7	3.76	1.38	18.5	3.88	1.39	20.9	4.30	1.43
	80	7.9	1.95	1.19	9.5	2.28	1.22	10.2	2.42	1.23	12.4	2.84	1.28	14.6	3.24	1.32	16.2	3.51	1.35	16.9	3.62	1.37	19.1	3.97	1.41
600	60	9.1	1.93	1.37	11.0	2.34	1.38	11.9	2.51	1.39	14.7	3.08	1.40	17.5	3.65	1.41	19.4	4.03	1.41	20.3	4.20	1.42	23.1	4.75	1.43
	70	8.6	1.94	1.30	10.4	2.30	1.33	11.2	2.45	1.34	13.7	2.93	1.37	16.2	3.39	1.40	18.0	3.70	1.43	18.8	3.83	1.44	21.3	4.25	1.47
	80	8.0	1.92	1.23	9.7	2.24	1.26	10.3	2.37	1.28	12.6	2.80	1.33	14.9	3.19	1.38	16.6	3.44	1.41	17.3	3.55	1.43	19.6	3.89	1.48
700	60	9.3	1.91	1.42	11.2	2.31	1.43	12.1	2.48	1.43	14.9	3.05	1.43	17.7	3.61	1.44	19.7	4.00	1.44	20.5	4.17	1.44	23.3	4.72	1.45
	70	8.7	1.91	1.34	10.5	2.27	1.36	11.3	2.42	1.37	13.9	2.90	1.41	16.5	3.36	1.44	18.3	3.67	1.46	19.1	3.80	1.47	21.7	4.22	1.51
	80	8.2	1.89	1.27	9.8	2.20	1.31	10.5	2.33	1.32	12.8	2.73	1.37	15.1	3.11	1.42	16.7	3.36	1.46	17.4	3.47	1.48	19.8	3.80	1.53

## PSH4BD024K with C6B(A,H)-X24(C,U)-(A,B) + VSB PSH4BD024K with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

100 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
650	60	11.6	2.16	1.57	14.0	2.57	1.59	15.0	2.74	1.61	18.5	3.29	1.65	21.9	3.82	1.69	24.4	4.17	1.71	25.4	4.32	1.73	28.9	4.79	1.77
	70	11.0	2.12	1.52	13.3	2.48	1.56	14.2	2.63	1.58	17.4	3.11	1.65	20.7	3.54	1.71	22.9	3.83	1.75	23.9	3.95	1.77	27.1	4.33	1.84
	80	10.4	2.04	1.50	12.5	2.37	1.55	13.4	2.50	1.57	16.4	2.92	1.64	19.3	3.31	1.71	21.4	3.56	1.77	22.3	3.66	1.79	25.3	3.99	1.86
750	60	11.6	2.12	1.61	14.1	2.53	1.63	15.1	2.70	1.64	18.7	3.25	1.68	22.2	3.78	1.72	24.6	4.14	1.75	25.7	4.29	1.76	29.2	4.77	1.80
	70	11.1	2.08	1.57	13.4	2.44	1.61	14.4	2.59	1.63	17.6	3.06	1.69	20.9	3.51	1.75	23.2	3.80	1.79	24.2	3.92	1.81	27.4	4.31	1.87
	80	10.5	2.01	1.53	12.7	2.34	1.59	13.6	2.47	1.61	16.6	2.89	1.68	19.7	3.27	1.76	21.8	3.52	1.81	22.7	3.63	1.84	25.7	3.95	1.91
850	60	11.8	2.09	1.65	14.2	2.49	1.68	15.3	2.66	1.69	18.9	3.22	1.72	22.4	3.75	1.75	24.9	4.11	1.77	25.9	4.26	1.78	29.5	4.76	1.82
	70	11.2	2.05	1.61	13.5	2.41	1.65	14.5	2.56	1.66	17.9	3.04	1.72	21.2	3.49	1.78	23.5	3.78	1.82	24.5	3.90	1.84	27.8	4.29	1.90
	80	10.7	1.99	1.57	12.8	2.31	1.63	13.7	2.44	1.65	16.8	2.85	1.73	19.8	3.23	1.80	22.0	3.47	1.85	22.9	3.58	1.88	25.9	3.90	1.95

## PSH4BD030K with C6B(A,H)-X30(C,U)-(A,B,C) + VSB PSH4BD030K with PAH4VMX30K(A,B), or B4VM-X30K-(A,B)

100 CFM	Indoor T. Deg.F	OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
750	60	14.7	2.42	1.78	17.6	2.77	1.87	18.9	2.91	1.90	23.1	3.33	2.03	27.2	3.70	2.16	30.1	3.94	2.25	31.4	4.03	2.28	35.6	4.33	2.41
	70	14.1	2.33	1.77	16.8	2.63	1.88	18.0	2.75	1.92	22.0	3.11	2.08	25.9	3.41	2.23	28.7	3.60	2.33	29.9	3.68	2.38	33.8	3.92	2.53
	80	13.5	2.23	1.78	16.1	2.49	1.90	17.2	2.59	1.95	20.9	2.90	2.12	24.7	3.16	2.29	27.3	3.32	2.41	28.4	3.38	2.46	32.1	3.57	2.63
850	60	14.8	2.38	1.82	17.7	2.73	1.90	19.0	2.87	1.94	23.2	3.30	2.06	27.5	3.69	2.19	30.5	3.93	2.27	31.7	4.03	2.31	36.0	4.34	2.43
	70	14.2	2.30	1.81	17.0	2.60	1.92	18.2	2.72	1.96	22.2	3.09	2.11	26.2	3.40	2.26	29.0	3.60	2.36	30.2	3.68	2.41	34.2	3.93	2.56
	80	13.6	2.20	1.82	16.3	2.46	1.93	17.4	2.57	1.99	21.2	2.88	2.16	25.0	3.15	2.33	27.6	3.31	2.44	28.7	3.38	2.49	32.5	3.58	2.66
950	60	14.9	2.34	1.86	17.9	2.70	1.94	19.1	2.84	1.98	23.4	3.28	2.10	27.7	3.67	2.21	30.7	3.92	2.30	32.0	4.02	2.33	36.3	4.34	2.45
	70	14.3	2.27	1.85	17.2	2.58	1.95	18.4	2.70	1.99	22.4	3.07	2.14	26.5	3.39	2.29	29.3	3.60	2.39	30.5	3.68	2.43	34.6	3.93	2.58
	80	13.7	2.17	1.85	16.4	2.44	1.97	17.5	2.54	2.02	21.3	2.86	2.19	25.1	3.13	2.36	27.8	3.30	2.47	28.9	3.36	2.52	32.7	3.57	2.69

# 13 SEER + VSB HEATING EXPANDED RATINGS (CONTINUED)

PSH4BD036K with C6B(A,H)-X36(C,U)-(B,C) + VSB  
 PSH4BD036K with PAH4VMX36KB, or B4VM-X36K-B

150 CFM		OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
Indoor T. Deg.F	60	17.3	2.48	2.05	21.0	2.83	2.18	22.5	2.96	2.23	27.7	3.36	2.42	32.9	3.71	2.61	36.6	3.92	2.74	38.2	4.00	2.79	43.4	4.26	2.98
70	16.7	2.35	2.08	20.2	2.65	2.23	21.7	2.77	2.29	26.6	3.12	2.51	31.6	3.41	2.72	35.1	3.59	2.87	36.6	3.66	2.94	41.6	3.87	3.15	
80	16.1	2.21	2.13	19.4	2.48	2.30	20.9	2.58	2.37	25.6	2.88	2.61	30.4	3.14	2.84	33.7	3.29	3.01	35.2	3.35	3.08	39.9	3.53	3.31	
1100	60	17.5	2.44	2.10	21.2	2.79	2.23	22.8	2.93	2.28	28.1	3.34	2.46	33.4	3.71	2.64	37.1	3.93	2.77	38.7	4.02	2.82	43.9	4.30	3.00
	70	16.9	2.31	2.14	20.4	2.62	2.28	21.9	2.74	2.35	27.0	3.10	2.55	32.1	3.41	2.76	35.6	3.60	2.90	37.1	3.68	2.96	42.2	3.91	3.17
	80	16.2	2.18	2.19	19.7	2.45	2.35	21.1	2.56	2.42	26.0	2.88	2.65	30.8	3.14	2.88	34.2	3.30	3.04	35.7	3.37	3.11	40.5	3.57	3.33
1250	60	17.6	2.40	2.15	21.3	2.75	2.27	23.0	2.89	2.33	28.3	3.32	2.50	33.7	3.69	2.68	37.5	3.93	2.80	39.1	4.02	2.85	44.5	4.31	3.03
	70	17.1	2.28	2.19	20.6	2.60	2.33	22.2	2.72	2.39	27.3	3.09	2.59	32.5	3.41	2.79	36.1	3.61	2.93	37.6	3.69	2.99	42.7	3.93	3.19
	80	16.5	2.15	2.24	19.9	2.43	2.40	21.4	2.54	2.47	26.3	2.86	2.69	31.2	3.14	2.91	34.6	3.31	3.07	36.1	3.37	3.13	41.0	3.58	3.36

PSH4BD042K with C6B(A,H)-X42(C,U)-(B,C) + VSB  
 PSH4BD042K with PAH4VMX42K(B,C), or B4VM-X42K-(B,C)

150 CFM		OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
Indoor T. Deg.F	60	22.3	2.53	2.58	26.2	2.87	2.68	27.9	3.01	2.72	33.5	3.44	2.86	39.1	3.83	3.00	43.0	4.08	3.09	44.7	4.18	3.13	50.2	4.51	3.27
70	21.5	2.34	2.70	25.3	2.65	2.80	27.0	2.77	2.85	32.4	3.16	3.00	37.8	3.51	3.15	41.5	3.74	3.26	43.2	3.83	3.30	48.6	4.12	3.46	
80	21.0	2.18	2.83	24.6	2.45	2.95	26.2	2.57	2.99	31.4	2.91	3.16	36.5	3.23	3.32	40.2	3.43	3.43	41.7	3.51	3.48	46.9	3.77	3.65	
1175	60	22.5	2.51	2.63	26.5	2.85	2.72	28.2	2.97	2.76	33.8	3.43	2.89	39.5	3.84	3.02	43.5	4.10	3.11	45.2	4.21	3.15	50.9	4.55	3.28
	70	21.8	2.33	2.74	25.6	2.64	2.84	27.2	2.77	2.89	32.7	3.16	3.03	38.2	3.53	3.17	42.0	3.76	3.28	43.6	3.86	3.32	49.1	4.16	3.46
	80	21.2	2.16	2.88	24.9	2.44	2.99	26.4	2.56	3.03	31.7	2.92	3.19	37.0	3.24	3.34	40.6	3.45	3.45	42.2	3.54	3.50	47.5	3.81	3.65
1325	60	22.5	2.47	2.67	26.6	2.82	2.76	28.3	2.97	2.80	34.1	3.42	2.92	39.9	3.83	3.05	43.9	4.10	3.14	45.6	4.21	3.18	51.4	4.56	3.30
	70	22.0	2.32	2.79	25.9	2.63	2.88	27.5	2.76	2.93	33.1	3.16	3.06	38.6	3.53	3.20	42.5	3.77	3.30	44.1	3.87	3.34	49.6	4.18	3.48
	80	21.4	2.15	2.92	25.1	2.43	3.03	26.7	2.55	3.07	32.0	2.91	3.22	37.3	3.25	3.37	41.0	3.47	3.47	42.6	3.55	3.52	47.9	3.83	3.67

PSH4BD048K with C6B(A,H)-X48(C,U)-(C,D) + VSB  
 PSH4BD048K with PAH4VMX48KC, or B4VM-X48K-C

200 CFM		OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
Indoor T. Deg.F	60	25.6	2.45	3.06	29.8	2.73	3.19	31.6	2.85	3.25	37.6	3.20	3.45	43.6	3.51	3.64	47.8	3.71	3.78	49.6	3.79	3.84	55.6	4.05	4.03
70	24.7	2.23	3.24	28.8	2.49	3.39	30.6	2.60	3.45	36.4	2.92	3.66	42.3	3.21	3.86	46.4	3.39	4.01	48.1	3.47	4.07	54.0	3.70	4.28	
80	24.2	2.06	3.45	28.1	2.29	3.61	29.8	2.38	3.67	35.5	2.67	3.89	41.1	2.93	4.11	45.0	3.09	4.27	46.7	3.16	4.33	52.3	3.37	4.55	
1475	60	25.8	2.44	3.10	30.1	2.73	3.23	31.9	2.85	3.29	38.1	3.22	3.47	44.2	3.55	3.65	48.5	3.76	3.78	50.3	3.85	3.84	56.4	4.12	4.02
	70	25.0	2.23	3.29	29.2	2.50	3.43	31.0	2.61	3.48	36.9	2.94	3.68	42.8	3.25	3.87	47.0	3.44	4.01	48.8	3.52	4.06	54.7	3.77	4.26
	80	24.4	2.04	3.50	28.5	2.29	3.65	30.2	2.39	3.71	35.9	2.69	3.91	41.6	2.97	4.12	45.7	3.15	4.26	47.4	3.22	4.32	53.1	3.44	4.52
1675	60	25.9	2.41	3.15	30.3	2.71	3.27	32.2	2.84	3.33	38.4	3.22	3.50	44.7	3.56	3.68	49.1	3.78	3.81	50.9	3.87	3.86	57.2	4.15	4.04
	70	25.4	2.23	3.34	29.6	2.50	3.47	31.4	2.61	3.52	37.4	2.96	3.71	43.4	3.27	3.89	47.6	3.47	4.02	49.4	3.55	4.08	55.4	3.81	4.26
	80	24.7	2.04	3.55	28.8	2.29	3.69	30.5	2.39	3.74	36.3	2.71	3.94	42.1	2.99	4.13	46.2	3.18	4.26	47.9	3.25	4.32	53.7	3.49	4.51

PSH4BD060K with C6B(A,H)-X60(C,U)-(C,D) + VSB  
 PSH4BD060K with PAH4VMX60KC, or B4VM-X60K-C

200 CFM		OUTDOOR TEMPERATURE (Deg. F)																							
		10			17			20			30			40			47			50			60		
		MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW	MBH	COP	kW
Indoor T. Deg.F	60	33.7	2.68	3.69	37.8	2.88	3.86	39.6	2.96	3.93	45.6	3.21	4.17	51.6	3.43	4.42	55.8	3.57	4.59	57.6	3.63	4.66	63.6	3.80	4.90
70	32.7	2.41	3.97	36.8	2.60	4.15	38.5	2.68	4.22	44.4	2.91	4.47	50.3	3.12	4.72	54.4	3.26	4.89	56.1	3.31	4.96	62.0	3.49	5.21	
80	32.2	2.21	4.28	36.2	2.38	4.46	37.8	2.44	4.54	43.5	2.66	4.80	49.1	2.84	5.06	53.0	2.97	5.24	54.7	3.02	5.32	60.4	3.17	5.58	
1650	60	34.0	2.68	3.72	38.2	2.89	3.88	40.0	2.98	3.95	46.1	3.24	4.18	52.2	3.48	4.41	56.5	3.63	4.57	58.3	3.69	4.63	64.4	3.88	4.86
	70	33.0	2.42	4.00	37.2	2.62	4.16	39.0	2.70	4.23	44.9	2.95	4.46	50.8	3.17	4.70	55.0	3.32	4.86	56.8	3.38	4.93	62.7	3.56	5.16
	80	32.4	2.20	4.31	36.5	2.39	4.48	38.2	2.46	4.55	43.9	2.69	4.79	49.7	2.89	5.03	53.7	3.03	5.20	55.4	3.08	5.27	61.2	3.25	5.51
1850	60	33.9	2.65	3.75	38.3	2.88	3.91	40.2	2.97	3.97	46.5	3.25	4.20	52.7	3.50	4.42	57.1	3.66	4.58	59.0	3.72	4.64	65.2	3.93	4.87
	70	33.4	2.43	4.04	37.6	2.63	4.19	39.4	2.71	4.26	45.4	2.97	4.48	51.4	3.21	4.70	55.6	3.36	4.85	57.4	3.42	4.92	63.4	3.62	5.14
	80	32.7	2.21	4.35	36.8	2.40	4.51	38.6	2.47	4.57	44.4	2.71	4.80	50.2	2.93	5.02	54.2	3.07	5.18	56.0	3.13	5.24	61.8	3.32	5.47

**USA**  
DESIGNED &  
ASSEMBLED



We Encourage  
Professionalism  
  
Through Technician  
Certification by NATE



**MAYTAG®**

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ®Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2011. All rights reserved.

268D-0711 (Replaces 268D-0310)

Printed in U.S.A. 07/11